


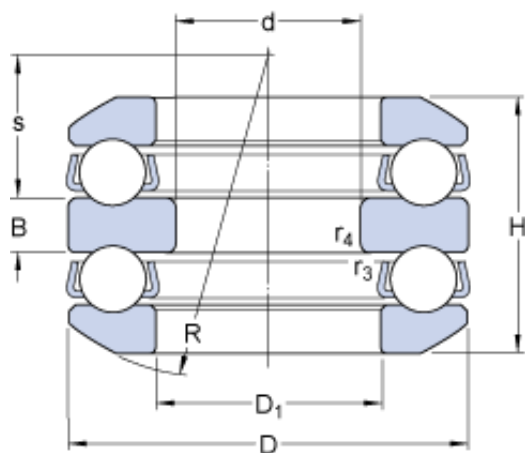

Bearing No. 54410 + U 410

R	72 mm
C	14 mm
d	40 mm
D	110 mm
H	83.2 mm
s	30 mm
B	18 mm
Size (mm)	110x40x83.2
Width (mm)	83,2
D ₃	115 mm
d _a	50 mm
d _a	50 mm
H ₁	92 mm
D ₂	80 mm
D ₃	115 mm
D ₂	80 mm
D ₁	52 mm
H ₁	92 mm
Limiting speed	1900 r/min
Bearing number	54410 + U 410
Reference speed	1400 r/min
r _b max.	0.6 mm
r _a max.	1.5 mm
D _a max.	80 mm
Bore Diameter (mm)	110
Outer Diameter (mm)	40
r _{3,4} min.	0.6 mm
r _{1,2} min.	1.5 mm
r _b - max.	0.6 mm

D_a - max.	80 mm
r_a - max.	1.5 mm
D_1 ?	52 mm
Minimum load factor A	0.6
$r_{3,4}$ - min.	0.6 mm
$r_{1,2}$ - min.	1.5 mm
Minimum load factor - A	0.6
Basic dynamic load rating C	148 kN
Basic dynamic load rating - C	148 kN
Fatigue load limit P_u	11.4 kN
Fatigue load limit - P_u	11.4 kN
Basic static load rating C_0	305 kN
Basic static load rating - C_0	305 kN
Mass bearing (including seat washer where applicable)	4.45 kg