


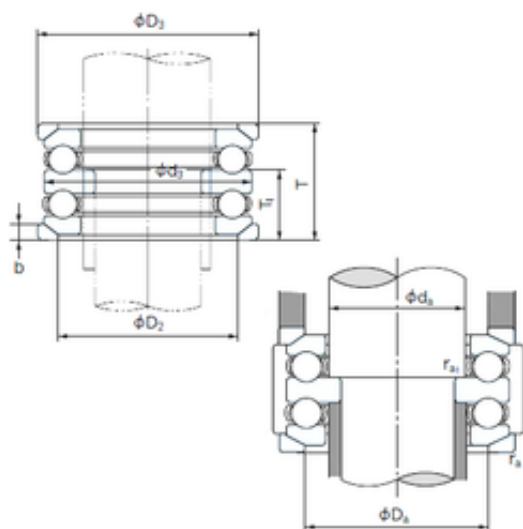

**Bearing No. 54410U**

|                               |            |
|-------------------------------|------------|
| a                             | 18 mm      |
| d                             | 50 mm      |
| b                             | 14 mm      |
| D                             | 110 mm     |
| T                             | 92 mm      |
| d3                            | 110 mm     |
| D3                            | 115 mm     |
| D2                            | 80 mm      |
| D1                            | 52 mm      |
| T1                            | 55 mm      |
| d2                            | 40 mm      |
| r min.                        | 1.5 mm     |
| Weight                        | 4.36 Kg    |
| Da max.                       | 80 mm      |
| r1 min.                       | 0.6 mm     |
| ra max.                       | 1.5 mm     |
| da min.                       | 50 mm      |
| ra1 max.                      | 0.6 mm     |
| Size (mm)                     | 50x110x92  |
| Width (mm)                    | 92         |
| Bearing number                | 54410U     |
| Bore Diameter (mm)            | 50         |
| Outer Diameter (mm)           | 110        |
| (Grease) Lubrication Speed    | 1400 r/min |
| Basic dynamic load rating (C) | 148 kN     |
| Basic static load rating (C0) | 283 kN     |