


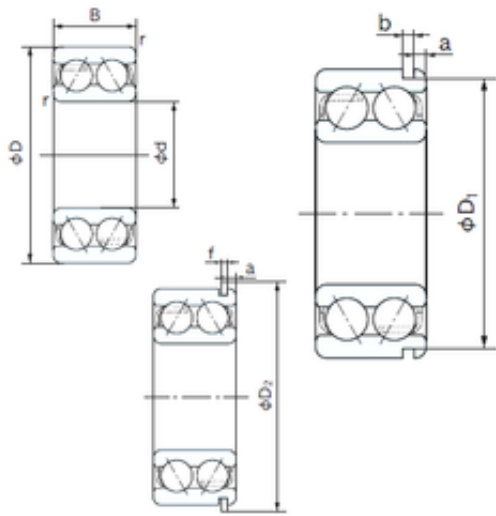

Bearing No. 5215NR

b	3.1 mm
f	2.82 mm
d	75 mm
D	130 mm
B	41.3 mm
C	41.3 mm
a	4.06 mm
da	84 mm
D2	139.7 mm
D1	125.22 mm
Cy	6.5 mm
Da	121 mm
Dx	141.5 mm
ra	1.5 mm
Width	41.3 mm
r min.	1.5 mm
Weight	1.91 Kg
a (max)	4.1 mm
Bore Type	Cylindrical Bore
Bore Size	75 mm
Enclosure	Snap Ring Groove with Snap Ring
Size (mm)	75x130x41.3
Width (mm)	41.3
Configuration	Double Row
Bearing number	5215NR
Snap Ring Width	2.8 mm
Radial Clearance	0.010 to 0.030 mm
Outside Diameter	130 mm
Bore Diameter (mm)	75

Static Load Rating	85,500 N
Dynamic Load Rating	96,000 N
Outer Diameter (mm)	130
Limiting Speed - Oil	4,700 rpm
Fillet Radius/Chamfer	1.5 mm
Limiting Speed - Grease	3,400 rpm
Snap Ring Outside Diameter	139.7 mm
(Grease) Lubrication Speed	3400 r/min
Basic static load rating (C0)	85,5 kN
Basic dynamic load rating (C)	96 kN