


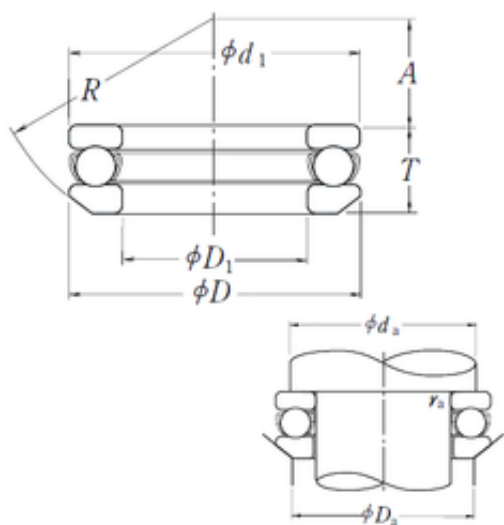

Bearing No. 53200

R	22 mm
C	12.8
r	0.6
d	10 mm
D	26 mm
T	11,6 mm
A	8,5 mm
R_	22
B_	11.6
ra	0.6
C0	17.1
da	20
Z_	9
A_	8.5
T3	11.6
d1	26 mm
D_	26
D1	12 mm
D_1	12
DA_	5.556
SRI	3
SRE	3
D_a	16
SREN	0
SRIN	0
yobi	53200
SRIX	0.03
mass	0.029
SDM_	18
KBRG	5121

SREX	0.03
Noun	Bearing
Bore 1	0.394 Inch 10 Millimeter
Banded	No
UNSPSC	31171552
r min.	0,6 mm
LangID	1
Weight	0,029 Kg
Height	0.457 Inch 11.6 Millimeter
Bore 2	0.472 Inch 12 Millimeter
Oil rpm	9000
GRS rpm	6000
hidYobi	53200
ra max.	0,6 mm
Da max.	16 mm
da min.	20 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	10x26x11.6
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	11,6
Weight / LBS	0.06393
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53200
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	10MM Bore 1; 12MM Bore 2; 26MM Outside Diameter; 11.6MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	1.024 Inch 26 Millimeter
Weight / Kilogram	0.039
Manufacturer Name	NSK
Bore Diameter (mm)	10
Outer Diameter (mm)	26
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	6000 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	17,1 kN
Basic dynamic load rating (C)	12,8 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter