


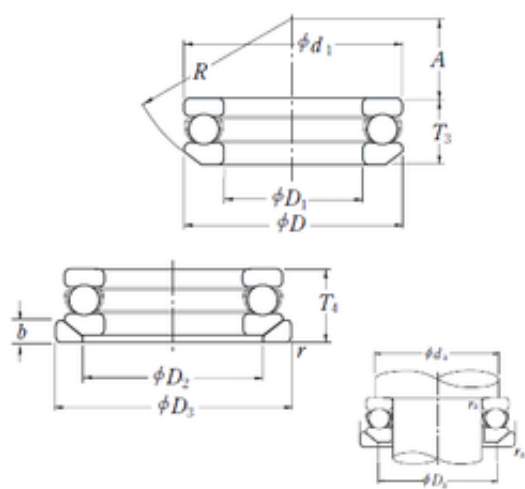

Bearing No. 53200U

C	12.8
D	26 mm
R	22 mm
A	8,5 mm
T	13 mm
b	3,5 mm
d	10 mm
r	0.6
A_	8.5
D_	26
Z_	9
da	20
T3	11.6
C0	17.1
T4	13
ra	0.6
B_	13
R_	22
D2	18 mm
D3	28 mm
D1	12 mm
d1	26 mm
D_2	18
D_3	28
SRE	3
D_1	12
SRI	3
DA_	5.556
D_a	16
SREX	0.03

SRIN	0
SREN	0
mass	0.036
yobi	53200U
SDM_	18
SRIX	0.03
KBRG	5131
r min.	0,6 mm
LangID	1
Weight	0,036 Kg
ra max.	0,6 mm
GRS rpm	6000
Oil rpm	9000
da min.	20 mm
Da max.	16 mm
hidYobi	53200U
hidTable	ecat_NSSDTB
Size (mm)	10x26x13
Prod_Type3	TB_SD_WASW
Width (mm)	13
Bearing number	53200U
Bore Diameter (mm)	10
Outer Diameter (mm)	26
(Grease) Lubrication Speed	6000 r/min
Basic static load rating (C0)	17,1 kN
Basic dynamic load rating (C)	12,8 kN