


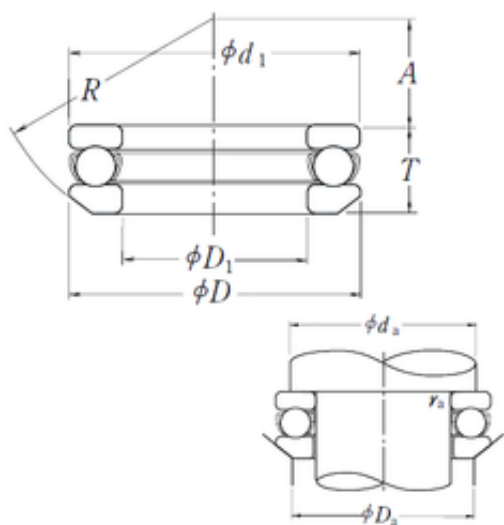

Bearing No. 53201

R	25 mm
C	13.3
r	0.6
d	12 mm
D	28 mm
T	11,4 mm
A	11,5 mm
R_	25
B_	11.4
ra	0.6
C0	19
da	22
Z_	10
A_	11.5
T3	11.4
d1	28 mm
D_	28
D1	14 mm
D_1	14
DA_	5.556
SRI	3
SRE	3
D_a	18
SREN	0
SRIN	0
yobi	53201
SRIX	0.03
mass	0.031
SDM_	20
KBRG	5121

SREX	0.03
Noun	Bearing
Bore 2	0.551 Inch 14 Millimeter
Height	0.433 Inch 11 Millimeter
Banded	No
UNSPSC	31171552
r min.	0,6 mm
LangID	1
Weight	0,031 Kg
Bore 1	0.472 Inch 12 Millimeter
GRS rpm	5600
hidYobi	53201
Oil rpm	8500
ra max.	0,6 mm
Da max.	18 mm
da min.	22 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	12x28x11.4
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	11,4
Weight / LBS	0.06834
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53201
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	12MM Bore 1; 14MM Bore 2; 28MM Outside Diameter; 11MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	1.102 Inch 28 Millimeter
Weight / Kilogram	0.042
Manufacturer Name	NSK
Bore Diameter (mm)	12
Outer Diameter (mm)	28
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	5600 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	19 kN
Basic dynamic load rating (C)	13,3 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter