


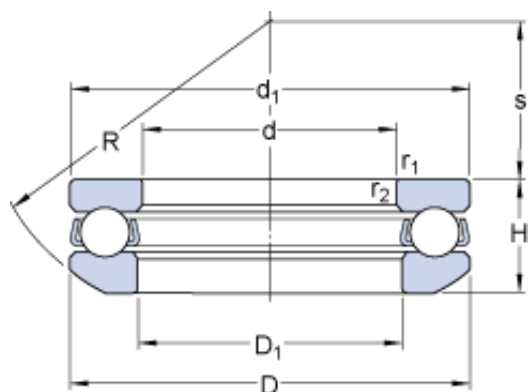

Bearing No. 53201 + U 201

S	11.5 mm
R	25 mm
d	12 mm
D	28 mm
H	11.4 mm
C	3.5 mm
Size (mm)	28x12x11.4
Width (mm)	11,4
D ₁	14 mm
D ₃	30 mm
H ₁	13 mm
D ₂	20 mm
d ₁	28 mm
H ₁	13 mm
D ₃	30 mm
D ₂	20 mm
Limiting speed	11000 r/min
Bearing number	53201 + U 201
Reference speed	8000 r/min
d _a min.	22 mm
D _a max.	20 mm
r _a max.	0.6 mm
Bore Diameter (mm)	28
Outer Diameter (mm)	12
r _a - max.	0.6 mm
D _a - max.	20 mm
r _{1,2} min.	0.6 mm
d _a - min.	22 mm
Minimum load factor A	0.0022

d_1 ?	28 mm
D_1 ?	14 mm
$r_{1,2}$ - min.	0.6 mm
Minimum load factor - A	0.0022
Basic dynamic load rating C	13.3 kN
Basic dynamic load rating - C	13.3 kN
Fatigue load limit P_u	0.765 kN
Fatigue load limit - P_u	0.765 kN
Basic static load rating C_0	20.8 kN
Basic static load rating - C_0	20.8 kN
Mass bearing (including seat washer where applicable)	0.045 kg