


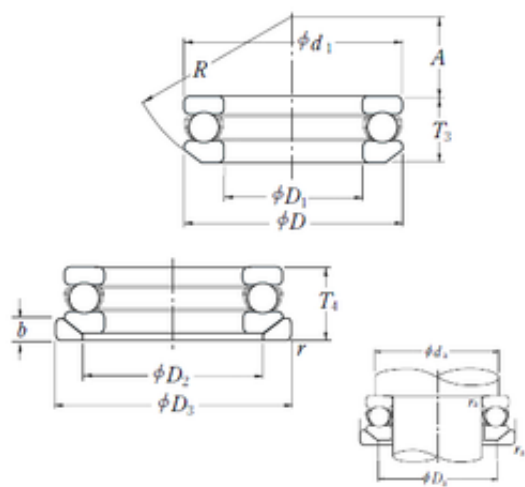

Bearing No. 53201U

C	13.3
D	28 mm
R	25 mm
A	11,5 mm
T	13 mm
b	3,5 mm
d	12 mm
r	0.6
A_	11.5
D_	28
Z_	10
da	22
T3	11.4
C0	19
T4	13
ra	0.6
B_	13
R_	25
D2	20 mm
D3	30 mm
D1	14 mm
d1	28 mm
D_2	20
D_3	30
SRE	3
D_1	14
SRI	3
DA_	5.556
D_a	18
SREX	0.03

SRIN	0
SREN	0
mass	0.039
yobi	53201U
SDM_	20
SRIX	0.03
KBRG	5131
r min.	0,6 mm
LangID	1
Weight	0,039 Kg
ra max.	0,6 mm
GRS rpm	5600
Oil rpm	8500
da min.	22 mm
Da max.	18 mm
hidYobi	53201U
hidTable	ecat_NSSDTB
Size (mm)	12x28x13
Prod_Type3	TB_SD_WASW
Width (mm)	13
Bearing number	53201U
Bore Diameter (mm)	12
Outer Diameter (mm)	28
(Grease) Lubrication Speed	5600 r/min
Basic static load rating (C0)	19 kN
Basic dynamic load rating (C)	13,3 kN