


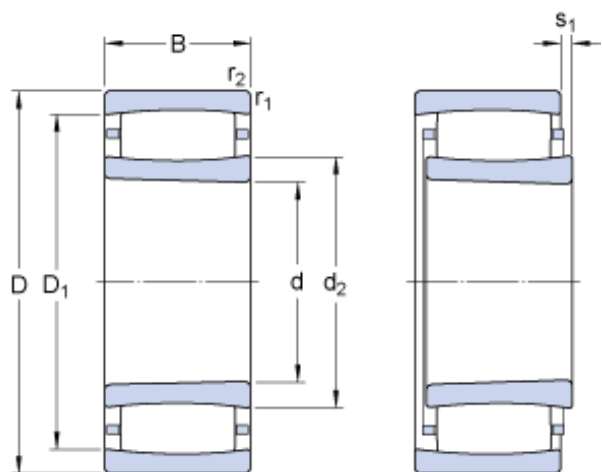

Bearing No. C 48/1320 K30MB

D	1600 mm
d	1320 mm
B	280 mm
Size (mm)	1600x1320x280
Width (mm)	280
d_2	1408 mm
D_1	1515 mm
s_1	65.7 mm
Bearing number	C 48/1320 K30MB
Limiting speed	260 r/min
Reference speed	190 r/min
Bore Diameter (mm)	1600
Outer Diameter (mm)	1320
C_a - min.	6.2 mm
r_a - max.	5 mm
d_a - min.	1343 mm
D_a - max.	1577 mm
D_a - min.	1512 mm
d_a - max.	1402 mm
$r_{1,2}$ - min.	6 mm
Factor - k_1	
Factor - k_2	0.123
Basic dynamic load rating - C	10600 kN
Fatigue load limit - P_u	1600 kN
Basic static load rating - C_0	30500 kN