


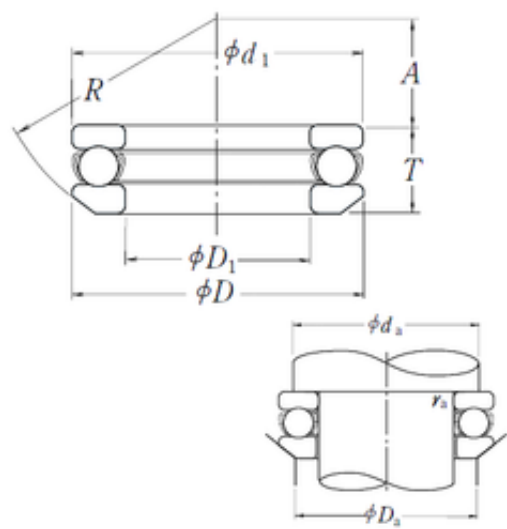

Bearing No. 53204

r	0.6
C	22.5
d	20 mm
D	40 mm
T	14,7 mm
A	18 mm
R	36 mm
R_	36
Z_	12
D_	40
B_	14.7
ra	0.6
C0	37.5
da	32
D1	22 mm
T3	14.7
A_	18
d1	40 mm
SRE	3.9
DA_	7.144
SRI	3.9
D_1	22
D_a	28
KBRG	5121
SREX	0.04
SDM_	30
yobi	53204
mass	0.08
SRIX	0.04
SRIN	0

SREN	0
Noun	Bearing
LangID	1
Height	0.591 Inch 15 Millimeter
Bore 1	0.787 Inch 20 Millimeter
Bore 2	0.866 Inch 22 Millimeter
UNSPSC	31171552
r min.	0,6 mm
Weight	0,08 Kg
Banded	No
series:	52300
da min.	32 mm
Da max.	28 mm
ra max.	0,6 mm
GRS rpm	4300
Oil rpm	6300
hidYobi	53204
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	20x40x14.7
Width (mm)	14,7
Prod_Type3	TB_SD_WAS
race type:	Flat
Weight / LBS	0.17637
maximum rpm:	6300 rpm
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Keyword String	Ball Thrust

bore diameter:	20 mm
Thrust Bearing	Yes
Other Features	Single Row With Aligning Seat
Bearing number	53204
fillet radius:	.6 mm
cage material:	Steel Cage
overall width:	17 mm
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Outside Diameter	1.575 Inch 40 Millimeter
Long Description	20MM Bore 1; 22MM Bore 2; 40MM Outside Diameter; 15MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Manufacturer URL	http://www.nskamericas.com
precision rating:	ABEC1, P0
Weight / Kilogram	0.1
Manufacturer Name	NSK
outside diameter:	40 mm
Bore Diameter (mm)	20
Outer Diameter (mm)	40
separable or banded:	Separable
Minimum Buy Quantity	N/A
thrust bearing type:	Single-Direction
static load capacity:	8500 lbf
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
dynamic load capacity:	5050 lbf

Manufacturer Item Number	53204
outside diameter design:	Straight
(Grease) Lubrication Speed	4300 r/min
Single or Double Direction	Single Direction
operating temperature range:	Maximum of +120 °C
Basic dynamic load rating (C)	22,5 kN
Basic static load rating (C0)	37,5 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter