


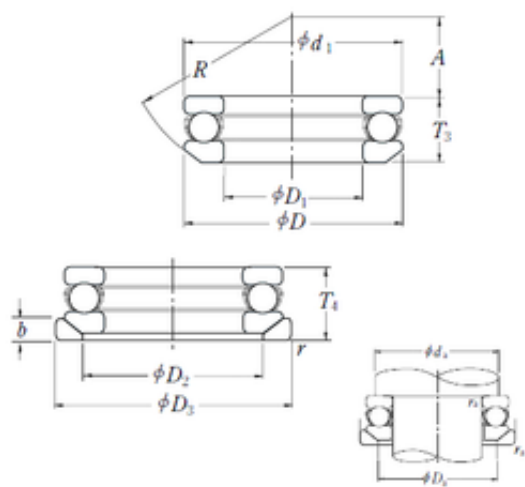

Bearing No. 53204U

C	22.5
D	40 mm
R	36 mm
A	18 mm
T	17 mm
b	5 mm
d	20 mm
r	0.6
A_	18
D_	40
Z_	12
da	32
T3	14.7
C0	37.5
T4	17
ra	0.6
B_	17
R_	36
D2	30 mm
D3	42 mm
D1	22 mm
d1	40 mm
D_2	30
D_3	42
SRE	3.9
D_1	22
SRI	3.9
DA_	7.144
D_a	28
SREX	0.04

SRIN	0
SREN	0
mass	0.096
yobi	53204U
SDM_	30
SRIX	0.04
KBRG	5131
r min.	0,6 mm
LangID	1
Weight	0,096 Kg
ra max.	0,6 mm
GRS rpm	4300
Oil rpm	6300
da min.	32 mm
Da max.	28 mm
hidYobi	53204U
hidTable	ecat_NSSDTB
Size (mm)	20x40x17
Prod_Type3	TB_SD_WASW
Width (mm)	17
Bearing number	53204U
Bore Diameter (mm)	20
Outer Diameter (mm)	40
(Grease) Lubrication Speed	4300 r/min
Basic static load rating (C0)	37,5 kN
Basic dynamic load rating (C)	22,5 kN