


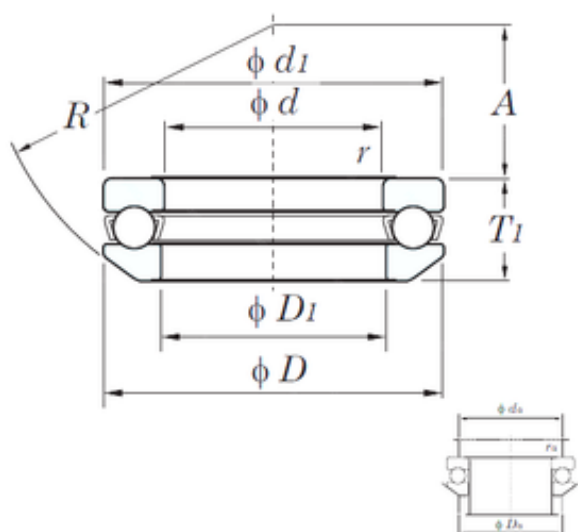

Bearing No. 53205

|             |            |
|-------------|------------|
| T           | 16.7       |
| d           | 25 mm      |
| D           | 47 mm      |
| C           | -          |
| A           | 19 mm      |
| R           | 40 mm      |
| Ca          | 34.6       |
| Cu          | 2.30       |
| T1          | 16,7 mm    |
| d1          | 47 mm      |
| D1          | 27 mm      |
| Coa         | 50.4       |
| Weight      | 0,12 Kg    |
| r(min)      | 0.6        |
| r min.      | 0,6 mm     |
| d1(max)     | 47         |
| D1(min)     | 27         |
| D2(min)     | -          |
| ra max.     | 0,6 mm     |
| da(min)     | 38         |
| D3(min)     | -          |
| Da max.     | 34 mm      |
| da min.     | 38 mm      |
| Da(max)     | 34         |
| ra(max)     | 0.6        |
| Oil lub.    | 5500       |
| Size (mm)   | 25x47x16.7 |
| Width (mm)  | 16,7       |
| Bearing No. | 53205      |
| Grease lub. | 3600       |
|             |            |

|                               |            |
|-------------------------------|------------|
| Bearing number                | 53205      |
| (Refer.)Mass(kg)              | 0.120      |
| Bore Diameter (mm)            | 25         |
| Outer Diameter (mm)           | 47         |
| (Grease) Lubrication Speed    | 3600 r/min |
| Basic dynamic load rating (C) | 27,8 kN    |
| Basic static load rating (C0) | 50,4 kN    |