


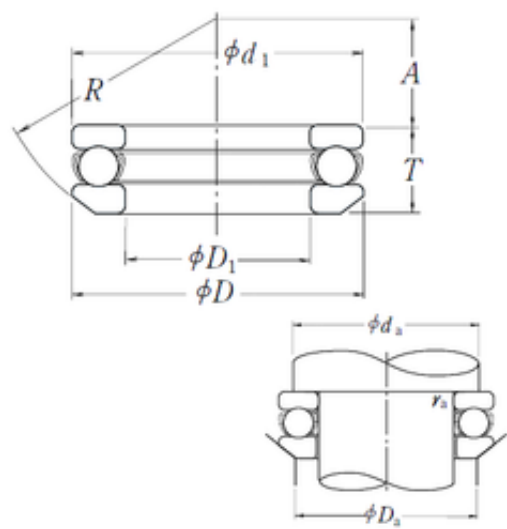

Bearing No. 53205

r	0.6
C	28
d	25 mm
D	47 mm
T	16,7 mm
A	19 mm
R	40 mm
R_	40
Z_	13
D_	47
B_	16.7
ra	0.6
C0	50.5
da	38
D1	27 mm
T3	16.7
A_	19
d1	47 mm
SRE	4.3
DA_	7.938
SRI	4.3
D_1	27
D_a	34
KBRG	5121
SREX	0.04
SDM_	36
yobi	53205
mass	0.123
SRIX	0.04
SRIN	0

SREN	0
Noun	Bearing
LangID	1
Height	0.669 Inch 17 Millimeter
Bore 2	1.063 Inch 27 Millimeter
Bore 1	0.984 Inch 25 Millimeter
UNSPSC	31171552
r min.	0,6 mm
Weight	0,123 Kg
Banded	No
series:	532
da min.	38 mm
Da max.	34 mm
ra max.	0,6 mm
GRS rpm	3800
Oil rpm	5600
hidYobi	53205
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	25x47x16.7
Width (mm)	16,7
Prod_Type3	TB_SD_WAS
race type:	Grooved
Weight / LBS	0.27117
maximum rpm:	5600 RPM
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Keyword String	Ball Thrust

bore diameter:	25 mm
Thrust Bearing	Yes
Other Features	Single Row With Aligning Seat
Bearing number	53205
fillet radius:	0.6 mm
cage material:	Steel
overall width:	16.7 mm
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Long Description	25MM Bore 1; 27MM Bore 2; 47MM Outside Diameter; 17MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	1.85 Inch 47 Millimeter
Manufacturer URL	http://www.nskamericas.com
precision rating:	ABEC 1 (ISO Class Normal)
Weight / Kilogram	0.15
Manufacturer Name	NSK
outside diameter:	47 mm
Bore Diameter (mm)	25
Outer Diameter (mm)	47
separable or banded:	Separable
Minimum Buy Quantity	N/A
thrust bearing type:	Single-Direction
static load capacity:	5150 kg
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
dynamic load capacity:	2860 kg

Manufacturer Item Number	53205
outside diameter design:	Sphered
(Grease) Lubrication Speed	3800 r/min
Single or Double Direction	Single Direction
operating temperature range:	Maximum of +120 °C
Basic dynamic load rating (C)	28 kN
Basic static load rating (C0)	50,5 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter