


Bearing No. RSAO40

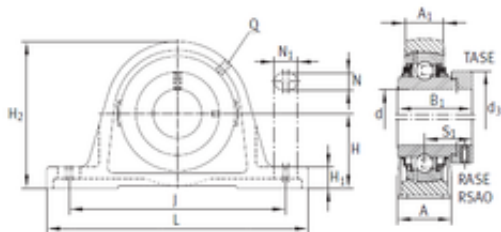

N	17,5 mm
d	40 mm
A	60 mm
H	60 mm
J	170 mm
L	220 mm
N1	27,5 mm
S1	36,6 mm
d3	63 mm
A1	31 mm
B1	54,6 mm
H1	22 mm
H2	116 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
Seals	Double Land Riding Rubber Contact
UNSPSC	31171511
Weight	3,18 Kg
Category	Pillow Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	7.01
Product Group	M06110
Housing Style	2 Bolt Pillow Block
Inch - Metric	Metric
Relubricatable	Yes
Keyword String	Pillow Block
Other Features	Single Row Heavy Series Extended Inner

	Race With Set Screw
Bearing number	RSAO40
Mounting Method	Eccentric Collar
Rolling Element	Ball Bearing
Manufacturer URL	http://www.ina.com
Housing Material	Cast Iron
Long Description	2 Bolt Pillow Block; 40MM Bore; 60MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 160MM Minimum Bolt Spacing; 180MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Riding
Length Thru Bore	2.15 Inch 54.6 Millimeter
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	3.808
Bore Diameter (mm)	40
Insert Part Number	GNE40KRRB
Bolt Spacing Maximum	7.087 Inch 180Millimeter
Bolt Spacing Minimum	6.299 Inch 160Millimeter
Minimum Buy Quantity	N/A
Base to Center Height	2.362 Inch 60 Millimeter
Housing Configuration	1 Piece Solid
Harmonized Tariff Code	8483.20.40.40
Manufacturer Item Number	RSAO40
Number of Mounting Holes	2
Expansion / Non-	Non-expansion

expansion	
Actual Bolt Center to Center	0 Inch 0Millimeter
Basic dynamic load rating (C)	44,5 kN
Nominal Bolt Center to Center	6.7 Inch 170 Millimeter