


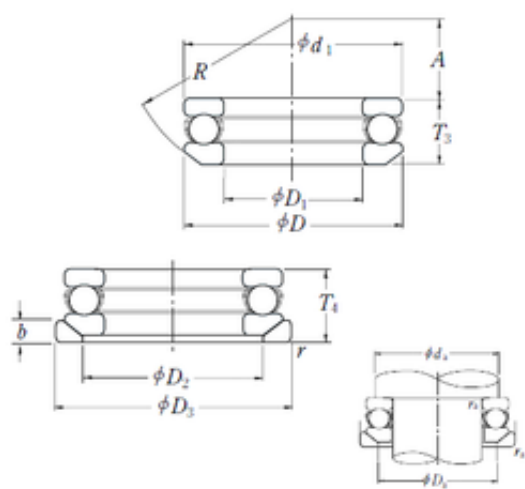

Bearing No. 53205U

C	28
D	47 mm
R	40 mm
A	19 mm
T	19 mm
b	5,5 mm
d	25 mm
r	0.6
A_	19
D_	47
Z_	13
da	38
T3	16.7
C0	50.5
T4	19
ra	0.6
B_	19
R_	40
D2	36 mm
D3	50 mm
D1	27 mm
d1	47 mm
D_2	36
D_3	50
SRE	4.3
D_1	27
SRI	4.3
DA_	7.938
D_a	34
SREX	0.04

SRIN	0
SREN	0
mass	0.151
yobi	53205U
SDM_	36
SRIX	0.04
KBRG	5131
r min.	0,6 mm
LangID	1
Weight	0,151 Kg
ra max.	0,6 mm
GRS rpm	3800
Oil rpm	5600
da min.	38 mm
Da max.	34 mm
hidYobi	53205U
hidTable	ecat_NSSDTB
Size (mm)	25x47x19
Prod_Type3	TB_SD_WASW
Width (mm)	19
Bearing number	53205U
Bore Diameter (mm)	25
Outer Diameter (mm)	47
(Grease) Lubrication Speed	3800 r/min
Basic static load rating (C0)	50,5 kN
Basic dynamic load rating (C)	28 kN