


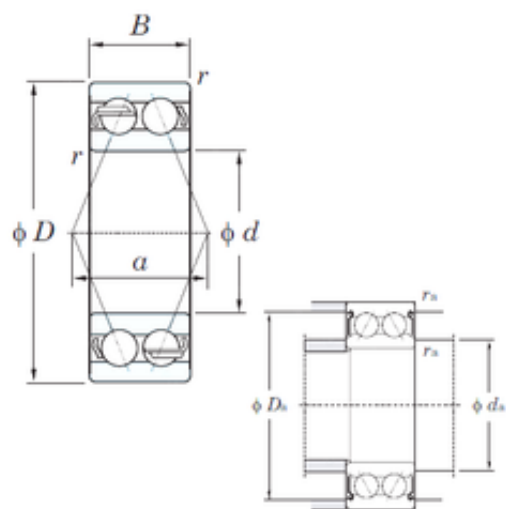

Bearing No. 5306

D	72 mm
d	30 mm
B	30.2 mm
C	30.2 mm
a	36.2 mm
Cu	1.45
Cr	51.2
C0r	28.5
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
Width	1.189 Inch 30.2 Millimeter
Weight	0.510 Kg
r(min)	1.1
UNSPSC	31171531
da max	41.3 mm
r min.	1.1 mm
ra max.	1 mm
Da max.	65 mm
da(max)	-
da(min)	37
Da(max)	65
ra(max)	1
da min.	37 mm
Category	Angular Contact Ball Bearing
Oil lub.	7700
Enclosure	Open
Inventory	0.0
Size (mm)	30x72x30.2

Snap Ring	No
Width (mm)	30.2
Grease lub.	5800
Bearing No.	5306
Flush Ground	No
Product Group	B00152
Cage Material	Steel
Contact Angle	24 Degree
Inch - Metric	Metric
Keyword String	Angular Contact
Bearing number	5306
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
(Refer.)Mass(kg)	0.510
Manufacturer URL	http://www.koyousa.com
Outside Diameter	2.835 Inch 72 Millimeter
Long Description	30MM Bore; 72MM Outside Diameter; 30.2MM Width; Open; No Flush Ground; Ball Bearing; Double Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 24 Degree; 1 (Single)
Manufacturer Name	KOYO
Weight / Kilogram	0.787
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28

Number of Rows of Balls	Double Row
(Grease) Lubrication Speed	5800 r/min
Basic static load rating (C0)	28.5 kN
Basic dynamic load rating (C)	41.0 kN
Maximum Capacity / Filling Slot	No