


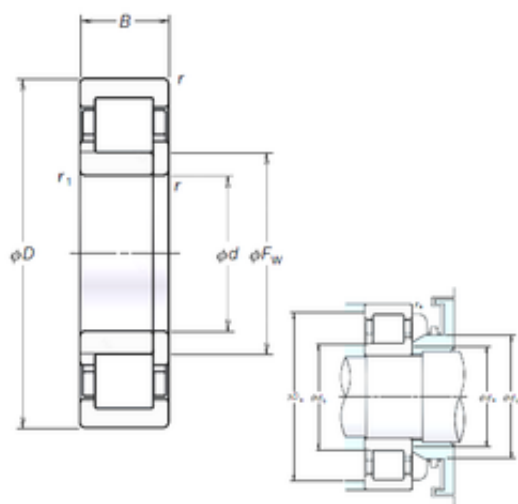

Bearing No. NUP307EM

B	21 mm
r	1.5
d	35 mm
D	80 mm
S	1,2 mm
C	21 mm
da	43
rb	1
ra	1.5
C0	65.5
B_	21
Fw	46,2 mm
Z_	12
r1	1.1
D_	80
DA_	12
DE_	70.2
DI_	46.2
SBRG	3
KBRG	4165
SDM_	58.2
yobi	NUP307EM
mass	0.567
C_conv	66500
r min.	1,5 mm
dc min	48
LangID	1
ALPHA_	0
db max	45
dd min	53

db min	41,5 mm
rb max.	1 mm
D_a max	72
da min.	43 mm
r1 min.	1,1 mm
Da max.	72 mm
hidYobi	NUP307EM
TSR rpm	8500
db max.	44 mm
GRS rpm	7500
Oil rpm	9500
ra max.	1,5 mm
hidTable	ecat_NSCLDR
Size (mm)	35x80x21
Macha rpm	11000
Width (mm)	21
Prod_Type3	CRB_SR_NUP
Bearing number	NUP307EM
Bore Diameter (mm)	35
Outer Diameter (mm)	80
(Grease) Lubrication Speed	8000 r/min
Basic static load rating (C0)	65,5 kN
Basic dynamic load rating (C)	66,5 kN