


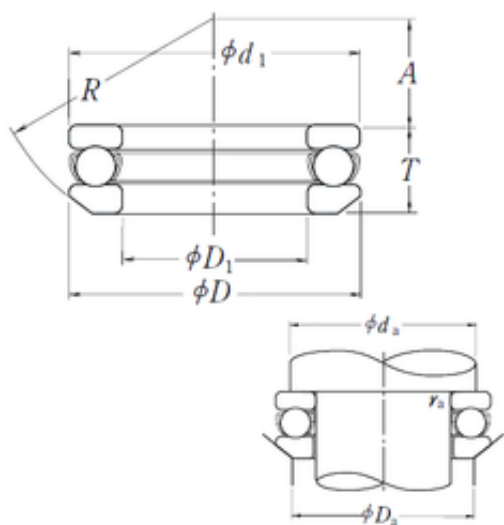

Bearing No. 53209

r	1
C	48
d	45 mm
D	73 mm
T	21,3 mm
A	26 mm
R	56 mm
R_	56
Z_	16
D_	73
B_	21.3
ra	1
C0	105
da	62
D1	47 mm
T3	21.3
A_	26
d1	73 mm
SRE	5.6
DA_	10.319
SRI	5.6
D_1	47
D_a	56
KBRG	5121
SREX	0.05
SDM_	59
yobi	53209
mass	0.333
SRIX	0.05
SRIN	0

SREN	0
Noun	Bearing
LangID	1
Bore 2	1.85 Inch 47 Millimeter
Height	0.827 Inch 21 Millimeter
Bore 1	1.772 Inch 45 Millimeter
UNSPSC	31171552
r min.	1 mm
Weight	0,333 Kg
Banded	No
series:	52300
da min.	62 mm
Da max.	56 mm
ra max.	1 mm
GRS rpm	2600
Oil rpm	4000
hidYobi	53209
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	45x73x21.3
Width (mm)	21,3
Prod_Type3	TB_SD_WAS
race type:	Flat
Weight / LBS	0.73414
maximum rpm:	4000 rpm
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Keyword String	Ball Thrust
bore diameter:	45 mm

Thrust Bearing	Yes
Other Features	Single Row With Aligning Seat
Bearing number	53209
overall width:	24 mm
cage material:	Steel Cage
fillet radius:	1 mm
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	45MM Bore 1; 47MM Bore 2; 73MM Outside Diameter; 21MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	2.874 Inch 73 Millimeter
precision rating:	ABEC1, P0
Weight / Kilogram	0.39
Manufacturer Name	NSK
outside diameter:	73 mm
Bore Diameter (mm)	45
Outer Diameter (mm)	73
separable or banded:	Separable
Minimum Buy Quantity	N/A
thrust bearing type:	Single-Direction
Component Description	Roller Assembly Plus Raceways
static load capacity:	23600 lbf
dynamic load capacity:	10800 lbf
Harmonized Tariff Code	8482.10.50.08
outside diameter design:	Straight

Manufacturer Item Number	53209
(Grease) Lubrication Speed	2600 r/min
Single or Double Direction	Single Direction
operating temperature range:	Maximum of +120 °C
Basic dynamic load rating (C)	48 kN
Basic static load rating (C0)	105 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter