


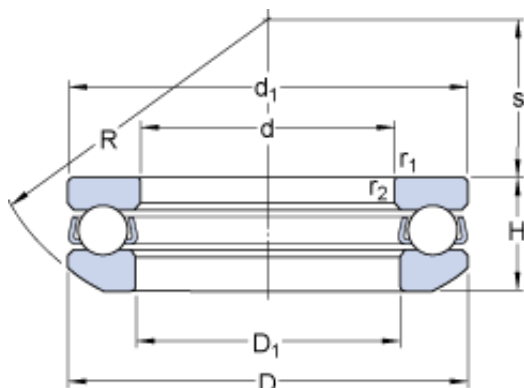

Bearing No. 53209 + U 209

s	26 mm
R	56 mm
d	45 mm
D	73 mm
H	21.3 mm
C	7.5 mm
Size (mm)	73x45x21.3
Width (mm)	21,3
D ₁	47 mm
D ₃	78 mm
H ₁	24 mm
D ₂	60 mm
d ₁	73 mm
H ₁	24 mm
D ₃	78 mm
D ₂	60 mm
Limiting speed	4800 r/min
Bearing number	53209 + U 209
Reference speed	3400 r/min
d _a min.	62 mm
D _a max.	60 mm
r _a max.	1 mm
Bore Diameter (mm)	73
Outer Diameter (mm)	45
r _a - max.	1 mm
D _a - max.	60 mm
r _{1,2} min.	1 mm
d _a - min.	62 mm
Minimum load factor A	0.038

d_1 ?	73 mm
D_1 ?	47 mm
$r_{1,2}$ - min.	1 mm
Minimum load factor - A	0.038
Basic dynamic load rating C	39 kN
Basic dynamic load rating - C	39 kN
Fatigue load limit P_u	3.2 kN
Fatigue load limit - P_u	3.2 kN
Basic static load rating C_0	86.5 kN
Basic static load rating - C_0	86.5 kN
Mass bearing (including seat washer where applicable)	0.39 kg