


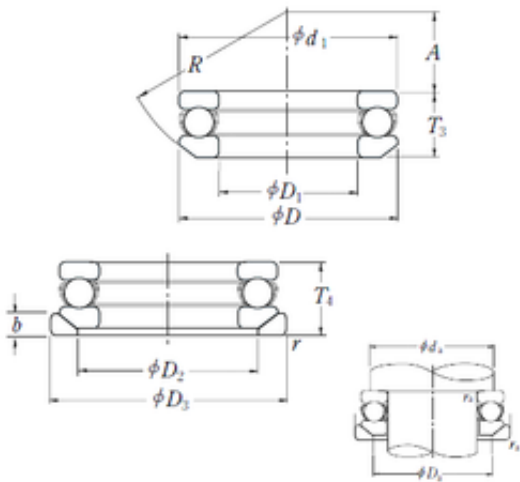

Bearing No. 53209U

C	48
D	73 mm
R	56 mm
A	26 mm
T	24 mm
b	7,5 mm
d	45 mm
r	1
A_	26
D_	73
Z_	16
da	62
T3	21.3
C0	105
T4	24
ra	1
B_	24
R_	56
D2	60 mm
D3	78 mm
D1	47 mm
d1	73 mm
D_2	60
D_3	78
SRE	5.6
D_1	47
SRI	5.6
DA_	10.319
D_a	56
SREX	0.05

SRIN	0
SREN	0
mass	0.419
yobi	53209U
SDM_	59
SRIX	0.05
KBRG	5131
r min.	1 mm
LangID	1
Weight	0,419 Kg
ra max.	1 mm
GRS rpm	2600
Oil rpm	4000
da min.	62 mm
Da max.	56 mm
hidYobi	53209U
hidTable	ecat_NSSDTB
Size (mm)	45x73x24
Prod_Type3	TB_SD_WASW
Width (mm)	24
Bearing number	53209U
Bore Diameter (mm)	45
Outer Diameter (mm)	73
(Grease) Lubrication Speed	2600 r/min
Basic static load rating (C0)	105 kN
Basic dynamic load rating (C)	48 kN