


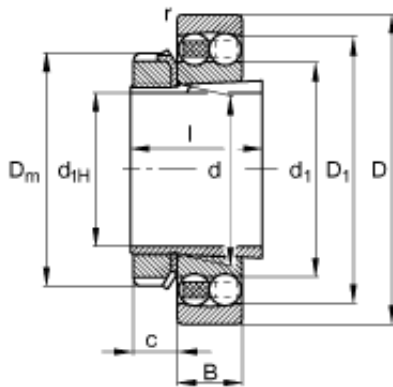

Bearing No. 1206-K-TVH-C3 + H206

	H206 / Adapter sleeve
d	30 mm
m	0,217 kg / Weight
e	0,25
D	62 mm
B	16 mm
l	27 mm
c	9 mm
Size (mm)	25x62x16
Width (mm)	16
m ₁	0,1 kg / Weight, adapter sleeve
Y ₁	2,53
d ₁	40,1 mm
Y ₂	3,91
D _m	45 mm
C _r	15900 N / Dynamic load rating (radial)
D ₁	51,9 mm
Y ₀	2,65
n _G	14000 1/min / Limiting speed
n _B	15400 1/min / Reference speed
C _{0r}	4600 N / Static load rating (radial)
Bearing number	1206-K-TVH-C3 + H206
C _{ur}	285 N / Fatigue limit load, radial
d _{1H}	25 mm
r _{a max}	1 mm

$d_{b \text{ min}}$	33 mm
$D_{a \text{ max}}$	56,4 mm
$B_{a \text{ min}}$	5 mm
$d_{a \text{ max}}$	35,6 mm
Bore Diameter (mm)	25
Outer Diameter (mm)	62