


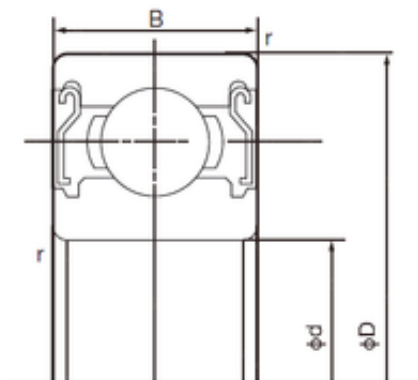

Bearing No. 6002ZZE

D	32 mm
d	15 mm
B	9 mm
C	9 mm
Noun	Bearing
Bore	0.591 Inch 15 Millimeter
Width	9 mm
UNSPSC	31171504
r min.	0.3 mm
Weight	0.032 Kg
da min.	17 mm
Da max.	30 mm
ra max.	0.3 mm
Category	Single Row Ball Bearing
ra (max)	0.3 mm
da (min)	17 mm
Da (max)	30 mm
Size (mm)	15x32x9
Snap Ring	No
Enclosure	2 Metal Shields
Bore Size	15 mm
Bore Type	Cylindrical Bore
Inventory	0.0
Factor fo	13.9
Width (mm)	9
Weight / LBS	0.0758
Product Group	B00308
Configuration	Single Row
Cage Material	Steel

Inch - Metric	Metric
Keyword String	Ball
Other Features	Deep Groove
Bearing number	6002ZZE
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	15MM Bore; 32MM Outside Diameter; 9MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel
Outer Race Width	0.354 Inch 9 Millimeter
Radial Clearance	0.003 to 0.018 mm
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Outside Diameter	1.26 Inch 32 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	2,840 N
Bore Diameter (mm)	15
Dynamic Load Rating	5,600 N
Outer Diameter (mm)	32
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	0.3 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	24,000 rpm
Internal Special Features	No
(Grease) Lubrication	23000 r/min

Speed	
Basic static load rating (C0)	2,84 kN
Basic dynamic load rating (C)	5,6 kN
Maximum Capacity / Filling Slot	No