


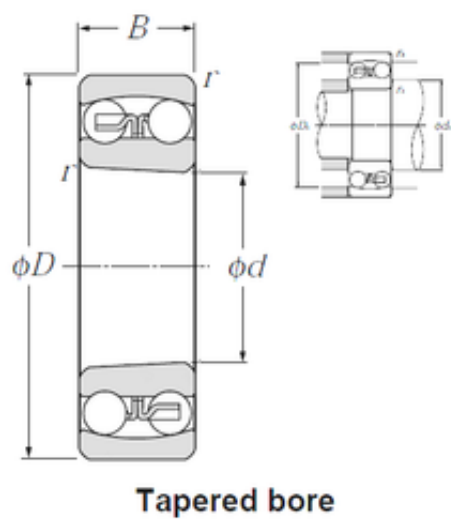

Bearing No. 1206SK

e	0.25
d	30 mm
D	62 mm
B	16 mm
C	16 mm
Y0	2.6
Y2	3.9
Y1	2.5
Mass	0.22 kg
ra max	1 mm
Da max	57 mm
Ce min	5 mm
db min	33 mm
da max	39 mm
da min	35 mm
rs min	1 mm
Weight	0,22 Kg
r min.	1 mm
Da max.	57 mm
da min.	35 mm
ra max.	1 mm
Size (mm)	30x62x16
Width (mm)	16
Nlim (oil)	12,000 rpm
Nlim (grease)	10,000 rpm
Bearing number	1206SK
Precision class	P0
Dynamic load, C	15.8 kN
Static load, C0	4.65 kN
Bore Diameter (mm)	30

Outer Diameter (mm)	62
Radial clearance class	CN
Calculation factor (e)	0,25
(Oil) Lubrication Speed	12 000 r/min
Calculation factor (Y1)	2,5
Calculation factor (Y0)	2,6
(Grease) Lubrication Speed	10 000 r/min
Associated sleeve reference	H206X
Basic dynamic load rating (C)	15,8 kN
Basic static load rating (C0)	4,65 kN
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C