


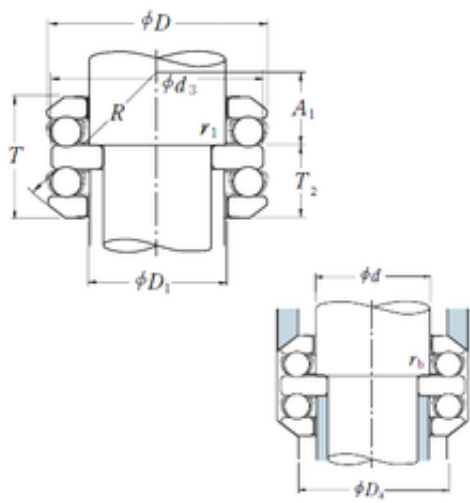

Bearing No. 54405

R	50 mm
d	25 mm
D	60 mm
T	49,8 mm
B	11 mm
T2	30,4 mm
A1	15 mm
D1	27 mm
d2	15 mm
d3	60 mm
Noun	Bearing
Bore 2	1.063 Inch 27 Millimeter
Banded	No
r min.	1 mm
Weight	0,68 Kg
Height	1.961 Inch 49.8 Millimeter
Bore 1	0.591 Inch 15 Millimeter
UNSPSC	31171552
r1 min.	0,6 mm
rb max.	0,6 mm
ra max.	1 mm
Da max.	42 mm
Category	Thrust Ball Bearings
Size (mm)	25x60x49.8
Inventory	0.0
Width (mm)	49,8
Weight / LBS	1.41316
Inch - Metric	Metric

Product Group	B00308
Cage Material	Steel
Bearing number	54405
Thrust Bearing	Yes
Keyword String	Ball Thrust
Other Features	Double Row With Aligning Seat
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Outside Diameter	2.362 Inch 60 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	15MM Bore 1; 27MM Bore 2; 60MM Outside Diameter; 49.8MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; Non-Precision
Weight / Kilogram	0.804
Manufacturer Name	NSK
Bore Diameter (mm)	25
Outer Diameter (mm)	60
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
Single or Double Direction	Double Direction
(Grease) Lubrication Speed	2400 r/min
Basic dynamic load rating (C)	56 kN
Basic static load rating (C0)	89,5 kN

Overall Height with Aligning Washer	0 Inch 0 Millimeter
--	-----------------------