


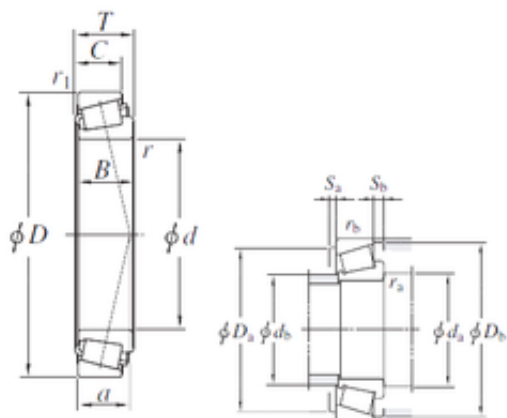

Bearing No. 28880/28820

|                               |                     |
|-------------------------------|---------------------|
| C                             | 15,875 mm           |
| d                             | 247,65 mm           |
| D                             | 304,8 mm            |
| T                             | 22,225 mm           |
| B                             | 22,225 mm           |
| a                             | 38,8 mm             |
| Db                            | 288 mm              |
| Da min                        | 285 mm              |
| Weight                        | 3,05 Kg             |
| r min.                        | 1,6 mm              |
| db max.                       | 262 mm              |
| Da max.                       | 295 mm              |
| r1 min.                       | 1,6 mm              |
| da min.                       | 257 mm              |
| rb max.                       | 1,6 mm              |
| ra max.                       | 1,6 mm              |
| Size (mm)                     | 247.65x304.8x22.225 |
| Width (mm)                    | 22,225              |
| Bearing number                | 28880/28820         |
| Bore Diameter (mm)            | 247,65              |
| Outer Diameter (mm)           | 304,8               |
| Calculation factor (e)        | 0,32                |
| Calculation factor (Y0)       | 1,02                |
| Basic dynamic load rating (C) | 155 kN              |
| Basic static load rating (C0) | 322 kN              |