


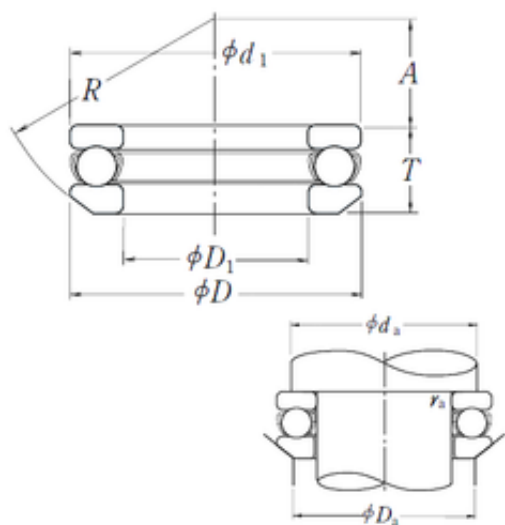

Bearing No. 53214

r	1
C	74
d	70 mm
D	105 mm
T	28,8 mm
A	38 mm
R	80 mm
R_	80
ra	1
da	91
A_	38
T3	28.8
C0	189
D1	72 mm
Z_	19
D_	105
d1	105 mm
B_	28.8
SRE	6.85
SRI	6.85
D_a	84
DA_	12.7
D_1	72
yobi	53214
KBRG	5121
SREX	0.05
Noun	Bearing
SRIX	0.05
SREN	0
SDM_	87.5

SRIN	0
mass	0.866
UNSPSC	31171552
Height	1.142 Inch 29 Millimeter
Bore 2	2.835 Inch 72 Millimeter
Weight	0,866 Kg
LangID	1
Banded	No
r min.	1 mm
Bore 1	2.756 Inch 70 Millimeter
hidYobi	53214
da min.	91 mm
ra max.	1 mm
GRS rpm	1900
Da max.	84 mm
Oil rpm	2800
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	70x105x28.8
Prod_Type3	TB_SD_WAS
Width (mm)	28,8
Weight / LBS	1.9092
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	53214
Keyword String	Ball Thrust
Other Features	Single Row With Aligning Seat

Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	4.134 Inch 105 Millimeter
Long Description	70MM Bore 1; 72MM Bore 2; 105MM Outside Diameter; 29MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Manufacturer Name	NSK
Weight / Kilogram	0.98
Bore Diameter (mm)	70
Outer Diameter (mm)	105
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item Number	53214
Single or Double Direction	Single Direction
(Grease) Lubrication Speed	1900 r/min
Basic static load rating (C0)	189 kN
Basic dynamic load rating (C)	74 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter