


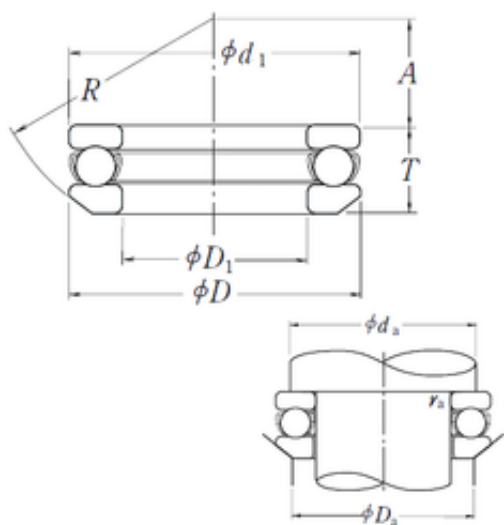

Bearing No. 53216

r	1
C	79
d	80 mm
D	115 mm
T	29,5 mm
A	46 mm
R	90 mm
R_	90
ra	1
da	101
A_	46
T3	29.5
C0	218
D1	82 mm
Z_	22
D_	115
d1	115 mm
B_	29.5
SRE	6.85
SRI	6.85
D_a	94
DA_	12.7
D_1	82
yobi	53216
KBRG	5121
SREX	0.05
mass	1.01
Noun	Bearing
SREN	0
SDM_	97.5

SRIN	0
SRIX	0.05
UNSPSC	31171552
Bore 2	3.228 Inch 82 Millimeter
Bore 1	3.15 Inch 80 Millimeter
Weight	1,01 Kg
Height	1.181 Inch 30 Millimeter
LangID	1
Banded	No
r min.	1 mm
hidYobi	53216
da min.	101 mm
ra max.	1 mm
GRS rpm	1800
Oil rpm	2600
Da max.	94 mm
hidTable	ecat_NSSDTB
Category	Thrust Ball Bearings
Inventory	0.0
Size (mm)	80x115x29.5
Prod_Type3	TB_SD_WAS
Width (mm)	29,5
Weight / LBS	2.22667
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	53216
Keyword String	Ball Thrust
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	4.528 Inch 115 Millimeter
Long Description	80MM Bore 1; 82MM Bore 2; 115MM Outside Diameter; 30MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Manufacturer Name	NSK
Weight / Kilogram	1.22
Bore Diameter (mm)	80
Outer Diameter (mm)	115
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
Manufacturer Item Number	53216
Single or Double Direction	Single Direction
(Grease) Lubrication Speed	1800 r/min
Basic static load rating (C0)	218 kN
Basic dynamic load rating (C)	79 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter