


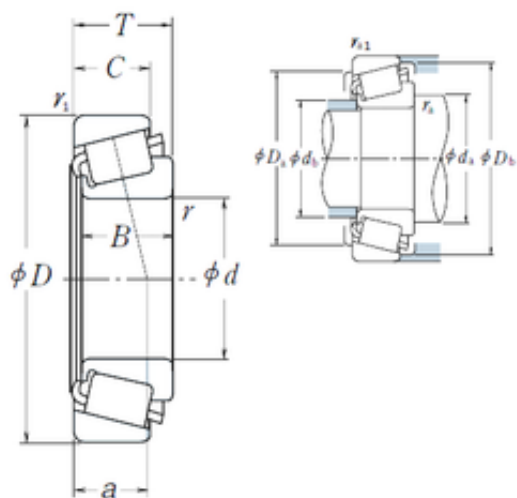

Bearing No. JM716649/JM716610

e	0.44
d	85 mm
D	130 mm
T	30 mm
B	29 mm
C	24 mm
a	29,5 mm
Da	117 mm
B_	29
Db	125 mm
da	98 mm
Y0	0.74
db	92 mm
C0	222
D_	130
Z_	26
C_	24
Y1	1.4
DE_	117.173
SLR	22.5
D_a	117
DI_	96.932
DA1	11.081
DA2	9.939
CUP	0.461
DA_	10.512
D_b	125
RAr	217.701
SDM_	107.157
KBRG	3141

yobi	JM716649/JM716610
CONE	0.943
ALP21	33
ALP22	0
ALP23	0
BETA_	1
BET21	2
BET23	0
BET22	55
r min.	3 mm
LangID	1
Weight	1,404 Kg
ALPHA_	16.5
r1 min.	2,5 mm
ra max.	3 mm
Oil rpm	3600
outer r	2.5
hidYobi	JM716649/JM716610
GRS rpm	2600
inner r	3
hidTable	ecat_NSTPRI
inner ra	3
outer rb	2.5
ra1 max.	2,5 mm
Size (mm)	85x130x30
SHOG_yobi	JM716649R/JM716610 R
Prod_Type3	TRBSR_ID_A
Width (mm)	30
Bearing number	JM716649/JM716610
Bore Diameter (mm)	85
Outer Diameter (mm)	130
Calculation factor (e)	0,44

(Oil) Lubrication Speed	3600 r/min
Calculation factor (Y0)	0,74
(Grease) Lubrication Speed	2600 r/min
Basic static load rating (C0)	222 kN
Basic dynamic load rating (C)	138 kN