


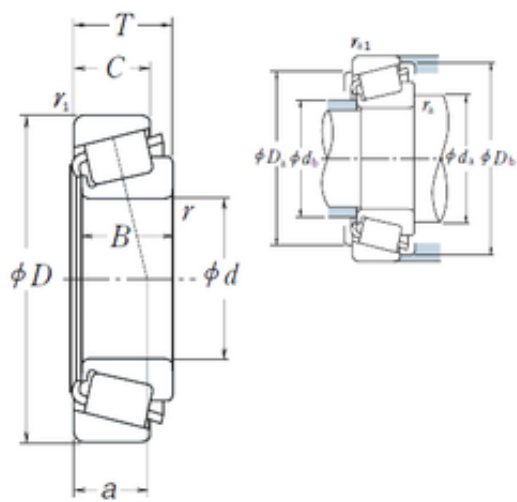

Bearing No. JM718149/JM718110

e	0.44
d	90 mm
D	145 mm
T	35 mm
B	34 mm
C	27 mm
a	33 mm
Da	131 mm
B_	34
Db	139 mm
da	105 mm
Y0	0.74
db	99 mm
C0	285
D_	145
Z_	22
C_	27
Y1	1.4
DE_	130.39
SLR	26.5
D_a	131
DI_	103.846
DA1	14.558
DA2	12.977
CUP	0.66
DA_	13.771
D_b	139
RAr	243
SDM_	117.248
KBRG	3141

yobi	JM718149/JM718110
CONE	1.49
ALP21	33
ALP22	0
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	26
r min.	3 mm
LangID	1
Weight	2,15 Kg
ALPHA_	16.5
r1 min.	2,5 mm
ra max.	3 mm
Oil rpm	3200
outer r	2.5
hidYobi	JM718149/JM718110
GRS rpm	2400
inner r	3
hidTable	ecat_NSTPRI
inner ra	3
outer rb	2.5
ra1 max.	2,5 mm
Size (mm)	90x145x35
SHOG_yobi	JM718149R/JM718110 R
Prod_Type3	TRBSR_ID_A
Width (mm)	35
Bearing number	JM718149/JM718110
Bore Diameter (mm)	90
Outer Diameter (mm)	145
Calculation factor (e)	0,44

(Oil) Lubrication Speed	3200 r/min
Calculation factor (Y0)	0,74
(Grease) Lubrication Speed	2400 r/min
Basic static load rating (C0)	285 kN
Basic dynamic load rating (C)	190 kN