


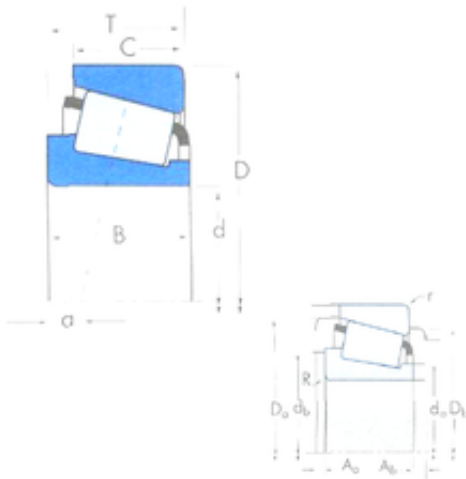

Bearing No. 29585/29522

|                                 |                  |
|---------------------------------|------------------|
| R                               | 3,6 mm           |
| d                               | 63,5 mm          |
| D                               | 107,95 mm        |
| T                               | 25,4 mm          |
| B                               | 25,4 mm          |
| C                               | 19,05 mm         |
| r                               | 0,8 mm           |
| Da                              | 103 mm           |
| Ab                              | 1,4 mm           |
| Aa                              | 2,2 mm           |
| Db                              | 98 mm            |
| da                              | 71 mm            |
| db                              | 77 mm            |
| a -                             | 0,8 mm           |
| Weight                          | 0,93 Kg          |
| Size (mm)                       | 63.5x107.95x25.4 |
| Width (mm)                      | 25,4             |
| Factor (K)                      | 1,27             |
| Factor (G1)                     | 70,3             |
| Factor (Cg)                     | 0,0303           |
| Factor (G2)                     | 25,9             |
| Bearing number                  | 29585/29522      |
| Bore Diameter (mm)              | 63,5             |
| Outer Diameter (mm)             | 107,95           |
| Calculation factor (e)          | 0,46             |
| Basic static load rating (C0)   | 161 kN           |
| Basic dynamic load rating (C1)  | 102 kN           |
| Basic dynamic load rating (C90) | 26,4             |

|                                  |      |
|----------------------------------|------|
| Basic dynamic load rating (Ca90) | 20,8 |
|----------------------------------|------|