


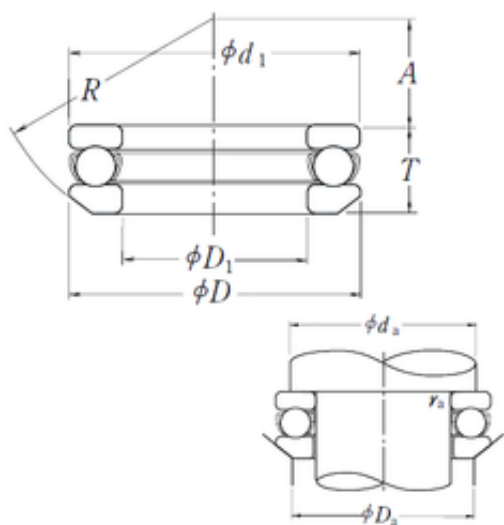

Bearing No. 53220

R	112 mm
C	135
r	1.1
d	100 mm
D	150 mm
T	40,9 mm
A	52 mm
R_	112
B_	40.9
ra	1
C0	375
da	130
Z_	20
A_	52
T3	40.9
d1	150 mm
D_	150
D1	103 mm
D_1	103
DA_	17.462
SRI	9.4
SRE	9.4
D_a	120
SREN	0
SRIN	0
yobi	53220
SRIX	0.065
mass	2.49
SDM_	125
KBRG	5121

SREX	0.065
Noun	Bearing
Height	1.614 Inch 41 Millimeter
Bore 1	3.937 Inch 100 Millimeter
Banded	No
UNSPSC	31171552
r min.	1,1 mm
LangID	1
Weight	2,49 Kg
Bore 2	4.055 Inch 103 Millimeter
GRS rpm	1300
hidYobi	53220
Oil rpm	2000
ra max.	1 mm
Da max.	120 mm
da min.	130 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	100x150x40.9
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	40,9
Weight / LBS	5.48951
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53220
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	100MM Bore 1; 103MM Bore 2; 150MM Outside Diameter; 41MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	5.906 Inch 150 Millimeter
Weight / Kilogram	2.84
Manufacturer Name	NSK
Bore Diameter (mm)	100
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	1300 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	375 kN
Basic dynamic load rating (C)	135 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter