


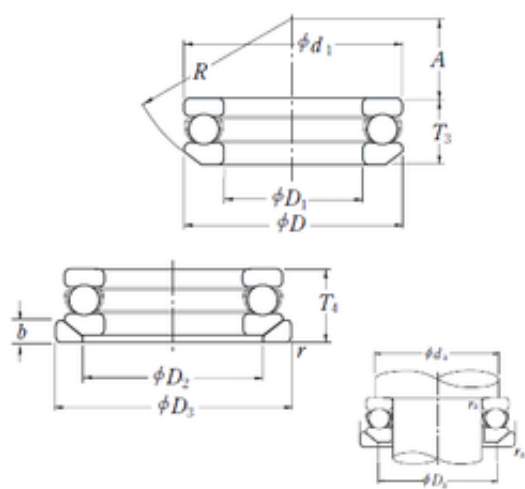

Bearing No. 53220U

C	135
D	150 mm
R	112 mm
A	52 mm
T	45 mm
b	14 mm
d	100 mm
r	1.1
A_	52
D_	150
Z_	20
da	130
T3	40.9
C0	375
T4	45
ra	1
B_	45
R_	112
D2	125 mm
D3	155 mm
D1	103 mm
d1	150 mm
D_2	125
D_3	155
SRE	9.4
D_1	103
SRI	9.4
DA_	17.462
D_a	120
SREX	0.065

SRIN	0
SREN	0
mass	3.03
yobi	53220U
SDM_	125
SRIX	0.065
KBRG	5131
r min.	1,1 mm
LangID	1
Weight	3,03 Kg
ra max.	1 mm
GRS rpm	1300
Oil rpm	2000
da min.	130 mm
Da max.	120 mm
hidYobi	53220U
hidTable	ecat_NSSDTB
Size (mm)	100x150x45
Prod_Type3	TB_SD_WASW
Width (mm)	45
Bearing number	53220U
Bore Diameter (mm)	100
Outer Diameter (mm)	150
(Grease) Lubrication Speed	1300 r/min
Basic static load rating (C0)	375 kN
Basic dynamic load rating (C)	135 kN