


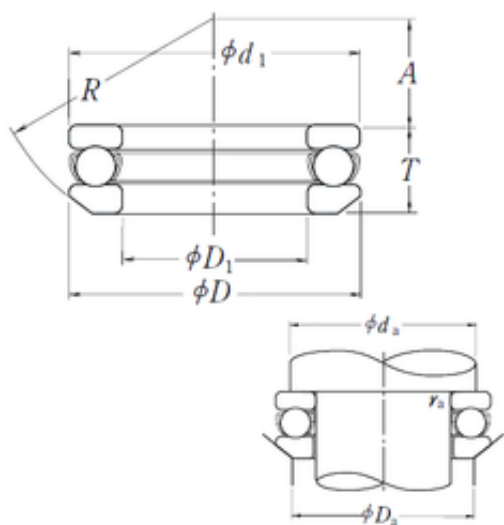

Bearing No. 53222

R	125 mm
C	136
r	1.1
d	110 mm
D	160 mm
T	40,2 mm
A	65 mm
R_	125
B_	40.2
ra	1
C0	395
da	140
Z_	21
A_	65
T3	40.2
d1	160 mm
D_	160
D1	113 mm
D_1	113
DA_	17.462
SRI	9.4
SRE	9.4
D_a	130
SREN	0
SRIN	0
yobi	53222
SRIX	0.065
mass	2.65
SDM_	135
KBRG	5121

SREX	0.065
Noun	Bearing
Height	1.575 Inch 40 Millimeter
Bore 2	4.449 Inch 113 Millimeter
Banded	No
UNSPSC	31171552
r min.	1,1 mm
LangID	1
Weight	2,65 Kg
Bore 1	4.331 Inch 110 Millimeter
GRS rpm	1300
hidYobi	53222
Oil rpm	1900
ra max.	1 mm
Da max.	130 mm
da min.	140 mm
Category	Thrust Ball Bearings
hidTable	ecat_NSSDTB
Size (mm)	110x160x40.2
Inventory	0.0
Prod_Type3	TB_SD_WAS
Width (mm)	40,2
Weight / LBS	5.84225
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	53222
Other Features	Single Row With Aligning Seat
Thrust Bearing	Yes

Keyword String	Ball Thrust
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Manufacturer URL	http://www.nskamericas.com
Long Description	110MM Bore 1; 113MM Bore 2; 160MM Outside Diameter; 40MM Height; Ball Bearing; Single Direction; Not Banded; Steel Cage; Non-Precision
Outside Diameter	6.299 Inch 160 Millimeter
Weight / Kilogram	3.06
Manufacturer Name	NSK
Bore Diameter (mm)	110
Outer Diameter (mm)	160
Minimum Buy Quantity	N/A
Component Description	Roller Assembly Plus Raceways
Harmonized Tariff Code	8482.10.50.08
(Grease) Lubrication Speed	1300 r/min
Single or Double Direction	Single Direction
Basic static load rating (C0)	395 kN
Basic dynamic load rating (C)	136 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter