


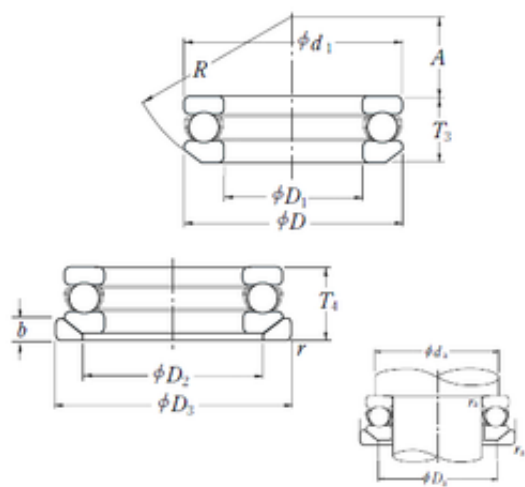

Bearing No. 53222U

C	136
D	160 mm
R	125 mm
A	65 mm
T	45 mm
b	14 mm
d	110 mm
r	1.1
A_	65
D_	160
Z_	21
da	140
T3	40.2
C0	395
T4	45
ra	1
B_	45
R_	125
D2	135 mm
D3	165 mm
D1	113 mm
d1	160 mm
D_2	135
D_3	165
SRE	9.4
D_1	113
SRI	9.4
DA_	17.462
D_a	130
SREX	0.065

SRIN	0
SREN	0
mass	3.2
yobi	53222U
SDM_	135
SRIX	0.065
KBRG	5131
r min.	1,1 mm
LangID	1
Weight	3,2 Kg
ra max.	1 mm
GRS rpm	1300
Oil rpm	1900
da min.	140 mm
Da max.	130 mm
hidYobi	53222U
hidTable	ecat_NSSDTB
Size (mm)	110x160x45
Prod_Type3	TB_SD_WASW
Width (mm)	45
Bearing number	53222U
Bore Diameter (mm)	110
Outer Diameter (mm)	160
(Grease) Lubrication Speed	1300 r/min
Basic static load rating (C0)	395 kN
Basic dynamic load rating (C)	136 kN