


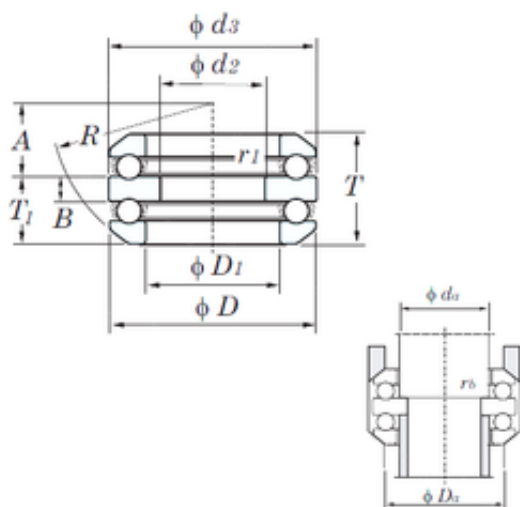

**Bearing No. 54305**

|                               |            |
|-------------------------------|------------|
| A                             | 18 mm      |
| R                             | 45 mm      |
| C                             | 6 mm       |
| B                             | 8 mm       |
| D                             | 52 mm      |
| T2                            | 22.8 mm    |
| D1                            | 27 mm      |
| d3                            | 52 mm      |
| T1                            | 37.6 mm    |
| d2                            | 20 mm      |
| r min.                        | 1 mm       |
| Weight                        | 0.330 Kg   |
| ra max.                       | 1 mm       |
| r1 min.                       | 0.3 mm     |
| rb max.                       | 0.3 mm     |
| da min.                       | 25 mm      |
| Da max.                       | 38 mm      |
| Size (mm)                     | 20x52x37.6 |
| Width (mm)                    | 37.6       |
| Bearing number                | 54305      |
| Bore Diameter (mm)            | 20         |
| Outer Diameter (mm)           | 52         |
| (Grease) Lubrication Speed    | 3100 r/min |
| Basic dynamic load rating (C) | 35.7 kN    |
| Basic static load rating (C0) | 61.4 kN    |