


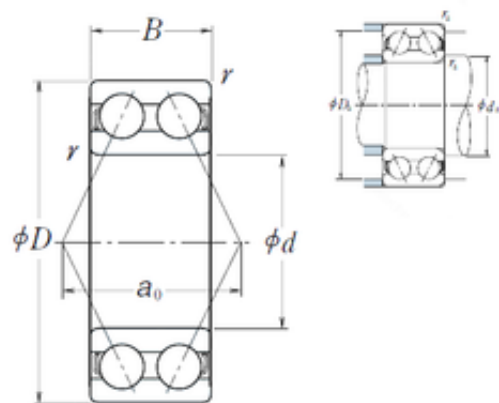

Bearing No. 5313

a	72,8 mm
r	2.1
d	65 mm
D	140 mm
B	58,7 mm
C	58,7 mm
C0	113
B_	58.7
D_	140
Z_	8
ao	72.8
ra	2
da	77
DI_	78.595
DE_	126.405
D_a	128
SRI	12.38
DA_	23.812
SRE	12.38
ALP	50
SDM_	102.5
mass	3.85
SREN	0
KBRG	1121
SRIN	0
SRIX	0.04
SREX	0.04
yobi	5313
r min.	2,1 mm
Weight	3,85 Kg

da max	128 mm
LangID	1
Oil rpm	4300
hidYobi	5313
da min.	77 mm
GRS rpm	3200
series:	5300
ra max.	2 mm
hidTable	ecat_NSANGBD
Size (mm)	65x140x58.7
Width (mm)	58,7
bore type:	Round
Prod_Type3	ACBB_DR_A
maximum rpm:	4300 rpm
closure type:	Open
Bearing number	5313
bore diameter:	65 mm
contact angle:	25 °
cage material:	Steel Cage
overall width:	2.3110 in
fillet radius:	2.1 mm
finish/coating:	Uncoated
precision rating:	ABEC1, P0
outside diameter:	140 mm
Bore Diameter (mm)	65
Outer Diameter (mm)	140
snap ring included:	Without Snap Ring
internal clearance:	C0
maximum temperature:	120 °C
row type & fill slot:	Double-Row Non-Fill Slot
(Grease) Lubrication Speed	3 200 r/min

radial dynamic load capacity:	142000 N
Basic static load rating (C0)	113 kN
Basic dynamic load rating (C)	142 kN