


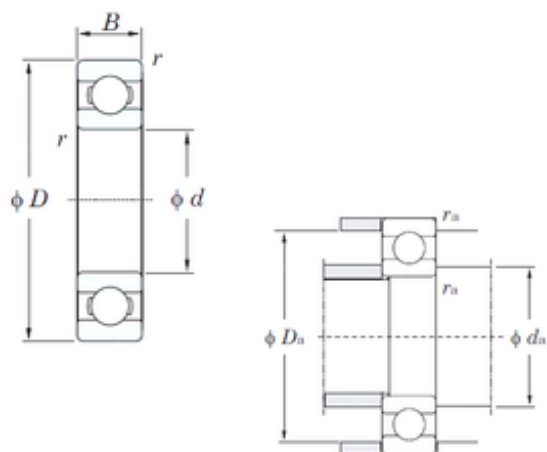

Bearing No. 16006

D	55 mm
d	30 mm
B	9 mm
C	9 mm
f0	15.2
Cu	0.440
Cr	14.1
C0r	7.35
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	0,085 Kg
r(min)	0.3
r min.	0,3 mm
da min.	32 mm
ra(max)	0.3
Da max.	53 mm
Da(max)	53
da(min)	32
ra max.	0,3 mm
Category	Single Row Ball Bearing
Oil lub.	15000
Inventory	0.0
Enclosure	Open
Size (mm)	30x55x9
Snap Ring	No
Width (mm)	9
Grease lub.	13000
Bearing No.	16006

Weight / LBS	0.206
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	16006
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	2.165 Inch 55 Millimeter
Long Description	30MM Bore; 55MM Outside Diameter; 9MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.354 Inch 9 Millimeter
(Refer.)Mass(kg)	0.085
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	0.094
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	30
Outer Diameter (mm)	55
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	15000 r/min
Manufacturer Item Number	16006
Internal Special Features	No
(Grease) Lubrication Speed	13000 r/min
Basic static load rating	7,35 kN

(C0)	
Basic dynamic load rating (C)	11,2 kN
Maximum Capacity / Filling Slot	No