


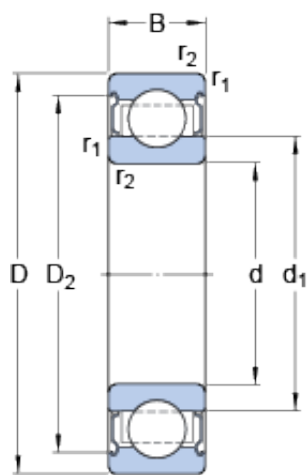

Bearing No. 6004-2Z/VA208

D	42 mm
d	20 mm
B	12 mm
Bore	0.787 Inch 20 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Inventory	0.0
Snap Ring	No
Size (mm)	42x20x12
Enclosure	2 Metal Shields
bore type:	Round
Width (mm)	12
maximum rpm:	140 RPM
Weight / LBS	0.071
Mass bearing	0.071 kg
Product Group	B00308
Inch - Metric	Metric
Cage Material	Graphite
closure type:	Double Shielded
D ₂	37.19 mm
d ₁	27.2 mm
Keyword String	Ball
bore diameter:	20 mm
cage material:	Graphite
fillet radius:	0.6 mm
Other Features	Deep Groove Extreme Temperature Variant

overall width:	12 mm
Bearing number	6004-2Z/VA208
Limiting speed	140 r/min
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.skf.com
Outer Race Width	0.472 Inch 12 Millimeter
Outside Diameter	1.654 Inch 42 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	20MM Bore; 42MM Outside Diameter; 12MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Segmented Cage Internal Special Features; C0-Medium Internal Cle
Manufacturer Name	SKF
outer ring width:	12 mm
Weight / Kilogram	0.072
precision rating:	Not Rated
outside diameter:	42 mm
D _a max.	38.8 mm
Bore Diameter (mm)	42
d _a min.	23.2 mm
r _a max.	0.6 mm
Internal Clearance	C0-Medium
d _a max.	27.1 mm
internal clearance:	C0
Outer Diameter (mm)	20

d _a - min.	23.2 mm
D _a - max.	38.8 mm
d _a - max.	27.1 mm
r _a - max.	0.6 mm
r _{1,2} min.	0.6 mm
Minimum Buy Quantity	N/A
resistance features:	Corrosion Resistant, Extreme Temperature
D ₂ ?	37.19 mm
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	5 kN
d ₁ ?	27.2 mm
Harmonized Tariff Code	8482.10.50.68
r _{1,2} - min.	0.6 mm
Manufacturer Item Number	6004-2Z/VA208
Limiting temperature - T	350 °C
Internal Special Features	Segmented Cage
Basic dynamic load rating C	9.95 kN
Limiting temperature T max.	350 °C
operating temperature range:	-240 to +660 °F
Basic dynamic load rating - C	10 kN
Maximum Capacity / Filling Slot	No
Basic static load rating C ₀	5 kN
Basic static load rating - C ₀	5 kN