


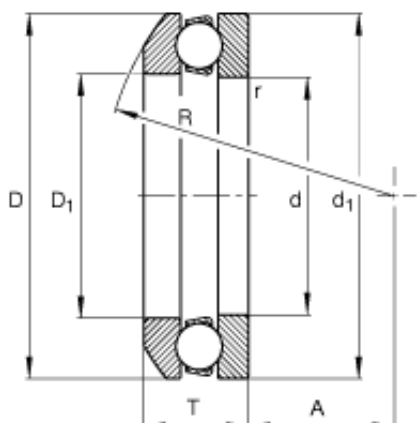

**Bearing No. 53226**

|                     |                                        |
|---------------------|----------------------------------------|
| m                   | 3,9 kg / Weight                        |
| d                   | 130 mm                                 |
| D                   | 190 mm                                 |
| T                   | 47,9 mm                                |
| A                   | 1,7 / Factor min. load                 |
| R                   | 140 mm                                 |
| Size (mm)           | 130x190x47.9                           |
| Width (mm)          | 47,9                                   |
| $n_G$               | 2210 1/min / Limiting speed            |
| $D_1$               | 133 mm                                 |
| $d_1$               | 187 mm                                 |
| $C_a$               | 183000 N / Dynamic load rating (axial) |
| Bearing number      | 53226                                  |
| $C_{0a}$            | 540000 N / Static load rating (axial)  |
| $C_{ua}$            | 18900 N / Fatigue limit load, axial    |
| $r_{min}$           | 1,5 mm                                 |
| $r_{a\ max}$        | 1,5 mm                                 |
| $d_{a\ min}$        | 166 mm                                 |
| $D_{a\ max}$        | 160 mm                                 |
| Bore Diameter (mm)  | 130                                    |
| Outer Diameter (mm) | 190                                    |