


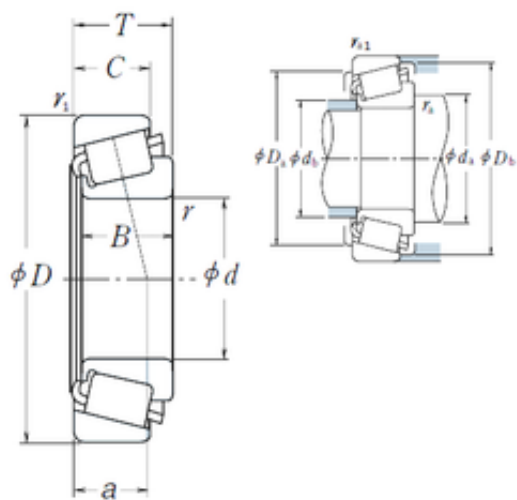

Bearing No. 29685/29620

e	0.49
d	73,025 mm
D	112,712 mm
T	25,4 mm
B	25,4 mm
C	19,05 mm
a	26,3 mm
Da	101 mm
B_	25.4
Db	109 mm
da	86 mm
Y0	0.68
db	80 mm
C0	152
D_	112.712
Z_	27
C_	19.05
Y1	1.2
DE_	101.524
SLR	18
D_a	101
DI_	84.863
DA1	9.237
DA2	8.283
CUP	0.273
DA_	8.762
D_b	109
RAr	173.558
SDM_	93.336
KBRG	3161

yobi	29685/29620
CONE	0.62
ALP21	36
ALP22	0
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	3
r min.	3,5 mm
LangID	1
Weight	0,893 Kg
ALPHA_	18
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	4000
outer r	3.3
hidYobi	29685/29620
GRS rpm	2800
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	73.025x112.712x25.4
SHOG_yobi	29685R/29620R
Prod_Type3	TRBSR_ID_A
Width (mm)	25,4
Bearing number	29685/29620
Bore Diameter (mm)	73,025
Outer Diameter (mm)	112,712
Calculation factor (e)	0,49

(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,68
(Grease) Lubrication Speed	2800 r/min
Basic static load rating (C0)	152 kN
Basic dynamic load rating (C)	96 kN