


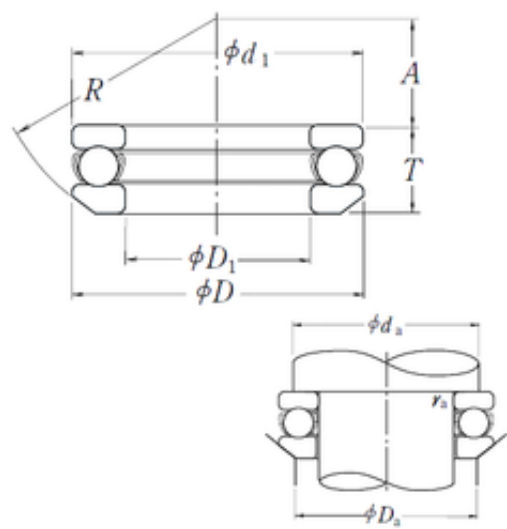

Bearing No. 53228X

C	186
r	1.5
d	140 mm
D	200 mm
T	48,6 mm
A	87 mm
R	160 mm
D_	200
T3	48.6
A_	87
Z_	22
da	176
C0	575
ra	1.5
B_	48.6
R_	160
D1	143 mm
d1	197 mm
D_a	164
SRI	11.15
DA_	20.638
D_1	143
SRE	11.15
SRIX	0.08
KBRG	5121
SDM_	170
yobi	53228X
SREX	0.08
SREN	0
mass	4.74

SRIN	0
r min.	1,5 mm
Weight	4,74 Kg
LangID	1
ra max.	1,5 mm
GRS rpm	1000
Oil rpm	1500
Da max.	164 mm
da min.	176 mm
hidYobi	53228X
hidTable	ecat_NSSDTB
Size (mm)	140x200x48.6
Width (mm)	48,6
Prod_Type3	TB_SD_WAS
Bearing number	53228X
Bore Diameter (mm)	140
Outer Diameter (mm)	200
(Grease) Lubrication Speed	1000 r/min
Basic static load rating (C0)	575 kN
Basic dynamic load rating (C)	186 kN