


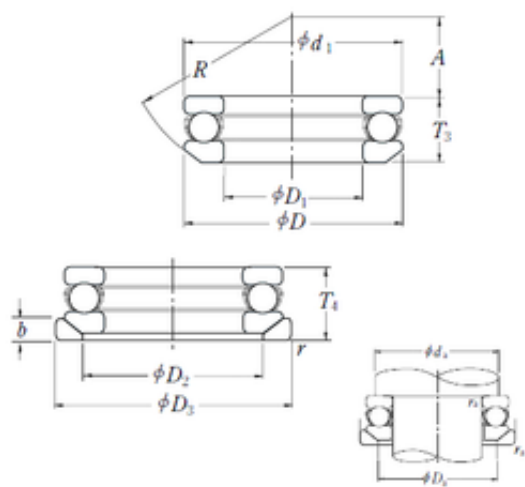

Bearing No. 53228XU

C	186
D	200 mm
R	160 mm
A	87 mm
T	55 mm
b	17 mm
d	140 mm
r	1.5
A_	87
D_	200
Z_	22
da	176
T3	48.6
C0	575
T4	55
ra	1.5
B_	55
R_	160
D2	170 mm
D3	210 mm
D1	143 mm
d1	197 mm
D_2	170
D_3	210
SRE	11.15
D_1	143
SRI	11.15
DA_	20.638
D_a	164
SREX	0.08

SRIN	0
SREN	0
mass	5.89
yobi	53228XU
SDM_	170
SRIX	0.08
KBRG	5131
r min.	1,5 mm
LangID	1
Weight	5,89 Kg
ra max.	1,5 mm
GRS rpm	1000
Oil rpm	1500
da min.	176 mm
Da max.	164 mm
hidYobi	53228XU
hidTable	ecat_NSSDTB
Size (mm)	140x200x55
Prod_Type3	TB_SD_WASW
Width (mm)	55
Bearing number	53228XU
Bore Diameter (mm)	140
Outer Diameter (mm)	200
(Grease) Lubrication Speed	1000 r/min
Basic static load rating (C0)	575 kN
Basic dynamic load rating (C)	186 kN