


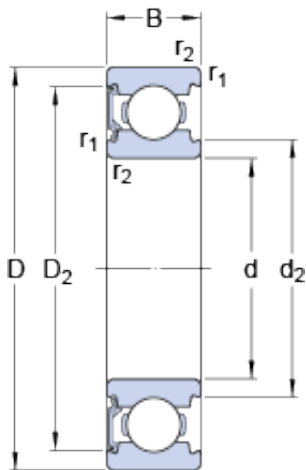

Bearing No. 6004-RSL

D	42 mm
d	20 mm
B	12 mm
Size (mm)	42x20x12
Width (mm)	12
Mass bearing	0.067 kg
D ₂	37.19 mm
d ₂	24.65 mm
Limiting speed	19000 r/min
Bearing number	6004-RSL
Reference speed	38000 r/min
D _a max.	38.8 mm
r _a max.	0.6 mm
Bore Diameter (mm)	42
d _a max.	24.5 mm
d _a min.	23.2 mm
Outer Diameter (mm)	20
r _{1,2} min.	0.6 mm
d _a - max.	24.5 mm
D _a - max.	38.8 mm
r _a - max.	0.6 mm
d _a - min.	23.2 mm
d ₂ ?	24.65 mm
D ₂ ?	37.19 mm
r _{1,2} - min.	0.6 mm
Basic dynamic load rating C	9.95 kN
Basic dynamic load rating - C	10 kN
Fatigue load limit P _u	0.212 kN

Calculation factor k_r	0.025
Calculation factor f_0	14
Calculation factor - f_0	14
Calculation factor - k_r	0.025
Fatigue load limit - P_u	0.212 kN
Basic static load rating C_0	5 kN
Basic static load rating - C_0	5 kN