


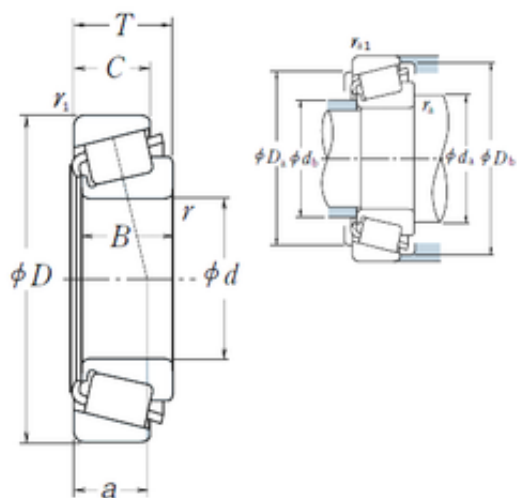

Bearing No. JLM813049/JLM813010

e	0.49
d	70 mm
D	110 mm
T	26 mm
B	25 mm
C	20,5 mm
a	26,2 mm
Da	98 mm
B_	25
Db	105 mm
da	78 mm
Y0	0.68
db	77 mm
C0	152
D_	110
Z_	25
C_	20.5
Y1	1.2
DE_	98.2
SLR	19
D_a	98
DI_	80.922
DA1	9.502
DA2	8.433
CUP	0.304
DA_	8.97
D_b	105
RAr	168.401
SDM_	89.64
KBRG	3141

yobi	JLM813049/JLM813010
CONE	0.604
ALP21	36
ALP22	0
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	14
r min.	1 mm
LangID	1
Weight	0,908 Kg
ALPHA_	18
r1 min.	2,5 mm
ra max.	1 mm
Oil rpm	4000
outer r	2.5
hidYobi	JLM813049/JLM813010
GRS rpm	3000
inner r	1
hidTable	ecat_NSTPRI
inner ra	1
outer rb	2.5
ra1 max.	2,5 mm
Size (mm)	70x110x26
SHOG_yobi	JLM813049R/010R
Prod_Type3	TRBSR_ID_A
Width (mm)	26
Bearing number	JLM813049/JLM813010
Bore Diameter (mm)	70
Outer Diameter (mm)	110
Calculation factor (e)	0,49

(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,68
(Grease) Lubrication Speed	3000 r/min
Basic static load rating (C0)	152 kN
Basic dynamic load rating (C)	98,5 kN