


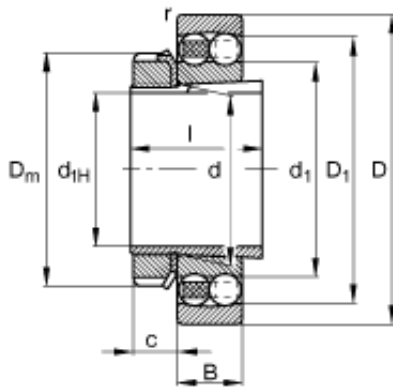

Bearing No. 2322-K-M-C3 + H2322

	H2322 / Adapter sleeve
d	110 mm
m	17,5 kg / Weight
e	0,37
D	240 mm
B	80 mm
l	105 mm
c	21 mm
Size (mm)	100x240x80
Width (mm)	80
m_1	2,78 kg / Weight, adapter sleeve
Y_1	1,69
d_1	145,5 mm
Y_2	2,62
D_m	145 mm
C_r	221000 N / Dynamic load rating (radial)
D_1	203 mm
Y_0	1,77
n_G	4300 1/min / Limiting speed
n_B	4600 1/min / Reference speed
C_{0r}	94000 N / Static load rating (radial)
Bearing number	2322-K-M-C3 + H2322
C_{ur}	4400 N / Fatigue limit load, radial
d_{1H}	100 mm
$r_{a \max}$	2,5 mm

$d_{b \text{ min}}$	121 mm
$D_{a \text{ max}}$	226 mm
$B_{a \text{ min}}$	7 mm
$d_{a \text{ max}}$	124 mm
Bore Diameter (mm)	100
Outer Diameter (mm)	240