


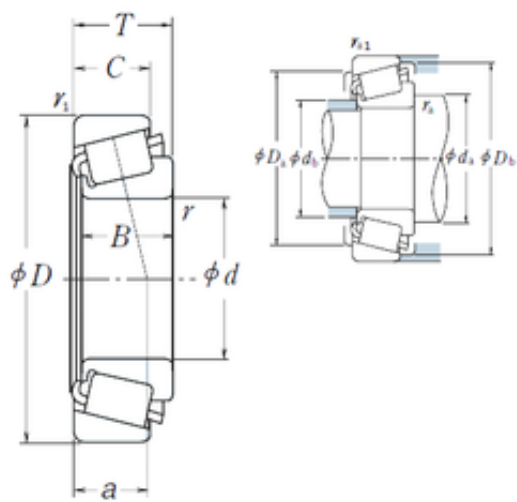

Bearing No. JLM820048/JLM820012

e	0.5
d	100 mm
D	150 mm
T	32 mm
B	30 mm
C	26 mm
a	36,8 mm
Da	135 mm
B_	30
Db	144 mm
da	111 mm
Y0	0.66
db	107 mm
C0	235
D_	150
Z_	28
C_	26
Y1	1.2
DE_	136.275
SLR	20.2
D_a	135
DI_	60
DA1	12.158
DA2	11.075
CUP	0.616
DA_	11.619
D_b	144
RAr	225.952
SDM_	125.798
KBRG	3141

yobi	JLM820048/JLM820012
CONE	1.27
ALP21	36
ALP22	58
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	5
r min.	2,3 mm
LangID	1
Weight	1,886 Kg
ALPHA_	18.483
r1 min.	2,3 mm
ra max.	2,3 mm
Oil rpm	3000
outer r	2.3
hidYobi	JLM820048/JLM820012
GRS rpm	2200
inner r	2.3
hidTable	ecat_NSTPRI
inner ra	2.3
outer rb	2.3
ra1 max.	2,3 mm
Size (mm)	100x150x32
SHOG_yobi	JLM820048R/012R
Prod_Type3	TRBSR_ID_A
Width (mm)	32
Bearing number	JLM820048/JLM820012
Bore Diameter (mm)	100
Outer Diameter (mm)	150
Calculation factor (e)	0,5

(Oil) Lubrication Speed	3000 r/min
Calculation factor (Y0)	0,66
(Grease) Lubrication Speed	2200 r/min
Basic static load rating (C0)	235 kN
Basic dynamic load rating (C)	146 kN