


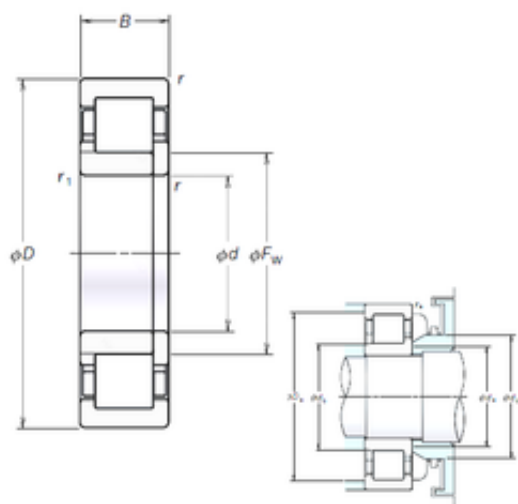

Bearing No. NUP2340EM

r	5
D	420 mm
C	138 mm
S	7,7 mm
B	138 mm
d	200 mm
Fw	253 mm
Z_	14
r1	5
da	220
C0	2760
ra	4
rb	4
B_	138
D_	420
DA_	58
DE_	369
DI_	253
yobi	NUP2340EM
mass	102
SDM_	311
KBRG	4165
SBRG	23
db min	220 mm
C_conv	1910000
Db max	400 mm
r min.	5 mm
ALPHA_	0
LangID	1
dd min	283

dc min	263
Weight	99,3 Kg
db max	247
da min.	220 mm
D_a max	400
r1 min.	5 mm
rb max.	4 mm
TSR rpm	1300
Da max.	400 mm
GRS rpm	1200
Oil rpm	1500
ra max.	4 mm
hidYobi	NUP2340EM
db max.	247 mm
hidTable	ecat_NSCLDR
Macha rpm	1900
Size (mm)	200x420x138
Prod_Type3	CRB_SR_NUP
Width (mm)	138
Bearing number	NUP2340EM
Bore Diameter (mm)	200
Outer Diameter (mm)	420
(Grease) Lubrication Speed	1200 r/min
Basic static load rating (C0)	2760 kN
Basic dynamic load rating (C)	1910 kN