


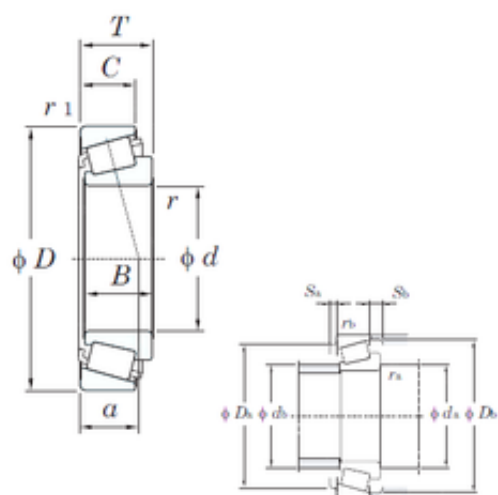

Bearing No. 30202R

D	35 mm
d	15 mm
T	11,75 mm
B	11 mm
C	10 mm
a	8,3 mm
e	0.32
Cr	19.8
Cu	2.00
Y0	1.04
Y1	1.88
C0r	14.5
Bore	0.591 Inch 15 Millimeter
Noun	Bearing
a(mm)	8.3
Da min	29 mm
da max	20 mm
Weight	0,054 Kg
r min.	0,6 mm
r(min)	0.6
UNSPSC	31171516
Db(min)	33
db(max)	20
Da(max)	30.5
Da(min)	29
r1(min)	0.6
Sa(min)	2
Sb(min)	1.7
ra(max)	0.6

rb(max)	0.6
da(min)	19.5
ra max.	0,6 mm
Db min.	33 mm
Da max.	30,5 mm
da min.	19,5 mm
r2 min.	0,6 mm
rb max.	0,6 mm
Oil lub.	16000
Category	Tapered Roller Bearings Assembly
Size (mm)	15x35x11.75
Component	Assembly
Inventory	0.0
Width (mm)	11,75
Grease lub.	12000
Bearing No.	30202R
Basic Number	30202
Weight / LBS	0.119
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	0.463 Inch 11.75 Millimeter
Bearing number	30202R
Precision Class	Standard
(Refer.)Mass(kg)	0.054
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 15MM Bore; 35MM Outside Diameter; 11.75MM Assembly Width; Single

	Row of Rollers
Outside Diameter	1.378 Inch 35 Millimeter
Weight / Kilogram	0.05
Manufacturer Name	KOYO
Bore Diameter (mm)	15
Outer Diameter (mm)	35
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,32
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	16000 r/min
Calculation factor (Y0)	1,04
Manufacturer Item Number	30202R
(Grease) Lubrication Speed	12000 r/min
Basic static load rating (C0)	14,5 kN
Basic dynamic load rating (C)	15,8 kN