


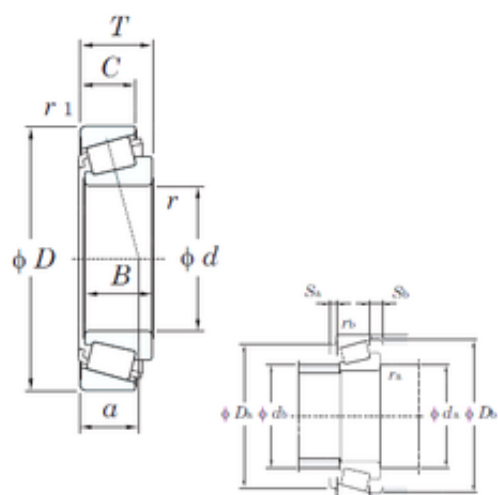

Bearing No. 30203JR

D	40 mm
d	17 mm
T	13,25 mm
B	12 mm
C	11 mm
a	10,1 mm
e	0.35
Cr	26.0
Cu	2.85
Y0	0.96
Y1	1.74
C0r	20.7
Bore	0.669 Inch 17 Millimeter
Noun	Bearing
a(mm)	10.1
Da min	33 mm
da max	23 mm
Weight	0,081 Kg
r min.	1 mm
r(min)	1
UNSPSC	31171516
Db(min)	37
db(max)	23
Da(max)	34.5
Da(min)	33
r1(min)	1
Sa(min)	2
Sb(min)	2
ra(max)	1

rb(max)	1
da(min)	22.5
ra max.	1 mm
Db min.	37 mm
Da max.	34,5 mm
da min.	22,5 mm
r2 min.	1 mm
rb max.	1 mm
Oil lub.	14000
Category	Tapered Roller Bearings Assembly
Size (mm)	17x40x13.25
Component	Assembly
Inventory	0.0
Width (mm)	13,25
Grease lub.	10000
Bearing No.	30203JR
Basic Number	30203
Weight / LBS	0.179
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity
Keyword String	Tapered
Assembly Width	0.522 Inch 13.25 Millimeter
Bearing number	30203JR
Precision Class	Standard
(Refer.)Mass(kg)	0.081
Outside Diameter	1.575 Inch 40 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 17MM Bore; 40MM Outside

	Diameter; 13.25MM Assembly Width; Single Row of Rollers
Weight / Kilogram	0.08
Manufacturer Name	KOYO
Bore Diameter (mm)	17
Outer Diameter (mm)	40
Minimum Buy Quantity	N/A
Calculation factor (e)	0,35
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	14000 r/min
Calculation factor (Y0)	0,96
Manufacturer Item Number	30203JR
(Grease) Lubrication Speed	10000 r/min
Basic static load rating (C0)	20,7 kN
Basic dynamic load rating (C)	20,8 kN