


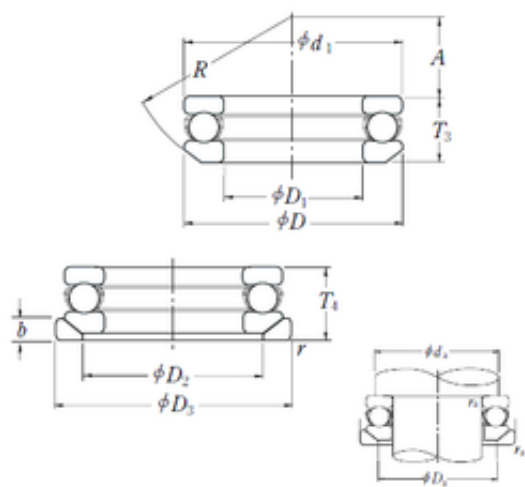

Bearing No. 53248XU

C	420
D	340 mm
R	250 mm
A	122 mm
T	92 mm
b	30 mm
d	240 mm
r	2.1
A_	122
D_	340
Z_	22
da	299
T3	81.6
C0	1650
T4	92
ra	2
B_	92
R_	250
D2	290 mm
D3	350 mm
D1	244 mm
d1	335 mm
D_2	290
D_3	350
SRE	18.85
D_1	244
SRI	18.85
DA_	34.925
D_a	281
SREX	0.125

SRIN	0
SREN	0
mass	30.7
yobi	53248XU
SDM_	290
SRIX	0
KBRG	513
r min.	2,1 mm
LangID	1
Weight	30,7 Kg
ra max.	2 mm
GRS rpm	560
Oil rpm	850
da min.	299 mm
Da max.	281 mm
hidYobi	53248XU
hidTable	ecat_NSSDTB
Size (mm)	240x340x92
Prod_Type3	TB_SD_WASW
Width (mm)	92
Bearing number	53248XU
Bore Diameter (mm)	240
Outer Diameter (mm)	340
(Grease) Lubrication Speed	560 r/min
Basic static load rating (C0)	1650 kN
Basic dynamic load rating (C)	420 kN